

176680
P. 60

Ground Vibration and Flight Flutter Tests of the Single-Seat F-16XL Aircraft With a Modified Wing

David F. Voracek

(NASA-TM-104264) GROUND VIBRATION
AND FLIGHT FLUTTER TESTS OF THE
SINGLE-SEAT F-16XL AIRCRAFT WITH A
MODIFIED WING (NASA) 60 p

N94-11233

Unclass

G3/05 0176680

June 1993



National Aeronautics and
Space Administration

Ground Vibration and Flight Flutter Tests of the Single-Seat F-16XL Aircraft With a Modified Wing

David F. Voracek
NASA Dryden Flight Research Facility
Edwards, California

1993



National Aeronautics and
Space Administration

Dryden Flight Research Facility
Edwards, California 93523-0273

CONTENTS

| | |
|--|----|
| ABSTRACT | 1 |
| NOMENCLATURE | 1 |
| INTRODUCTION | 1 |
| DESCRIPTION OF THE TEST AIRCRAFT | 2 |
| TEST OBJECTIVES | 2 |
| INSTRUMENTATION | 2 |
| TEST PROCEDURES AND DATA ANALYSIS | 3 |
| Ground Vibration Tests | 3 |
| Flight Test | 4 |
| RESULTS AND DISCUSSION | 4 |
| Ground Vibration Tests | 5 |
| Flutter Analysis | 7 |
| Flight Test | 9 |
| CONCLUDING REMARKS | 9 |
| REFERENCES | 10 |
| FIGURES | 12 |
| APPENDIX | 46 |

PRECEDING PAGE BLANK NOT FILMED

ABSTRACT

The NASA single-seat F-16XL aircraft was modified by the addition of a glove to the left wing. Vibration tests were conducted on the ground to assess the changes to the aircraft caused by the glove. Flight flutter testing was conducted on the aircraft with the glove installed to ensure that the flight envelope was free of aeroelastic or aeroservoelastic instabilities. The ground vibration tests showed that above 20 Hz, several modes that involved the control surfaces were significantly changed. Flight test data showed that modal damping levels and trends were satisfactory where obtainable. The data presented in this report include estimated modal parameters from the ground vibration and flight flutter test.

NOMENCLATURE

| | |
|------|---|
| GVT | ground vibration test |
| FRF | frequency response function |
| KEAS | knots equivalent airspeed |
| MAC | modal assurance criteria |
| MMIF | multivariate mode indicator function |
| NACA | National Advisory Committee on Aeronautics |
| NASA | National Aeronautics and Space Administration |
| Q | dynamic pressure, lb/ft^2 |

INTRODUCTION

The National Aeronautics and Space Administration (NASA) Dryden Flight Research Facility has conducted many aircraft ground and flight test programs to determine the aeroelastic stability of new and modified research vehicles (refs. 1 and 2). These programs tested new aircraft (ref. 3) and aircraft that have been structurally modified (refs. 4-8).

The left wing of the single-seat F-16XL aircraft was modified to demonstrate new aerodynamic technologies on a highly swept wing planform at supersonic speeds. A titanium test glove was faired to the left wing with graphite and epoxy. Previous experience with similar gloves on aircraft wings showed frequency shifts in the wing torsion modes that had the potential of lowering the flutter speed (refs. 4 and 5). The structural dynamic concerns for the F-16XL modification were the effects on the aeroelastic and aeroservoelastic characteristics caused by the changes in weight, stiffness, and airfoil shape.

The work discussed in this report assessed the effects of the wing glove on the aeroelastic and aeroservoelastic stability and cleared a flight envelope for the aerodynamic experiments. Previous structural dynamic data documented during the design of the F-16XL did not contain any ground or flight tests of the modified aircraft configuration. So ground vibration and flight tests were required before and after the modification. One ground vibration test (GVT) was performed before the modification for baseline data;

another GVT was performed after the modification for comparison; then flight flutter was tested. The desired envelope for the aerodynamic experiments was a dynamic pressure of 533 lb/ft^2 up to an altitude of 32,000 ft, then increasing Mach number at 32,000 ft to a dynamic pressure of 1008 lb/ft^2 up to the temperature limit (160°F) of the glove design. The flutter clearance was the final proof of the aeroelastic and aero-servoelastic stability of the aircraft.

This report describes the approach taken to flight-qualify the aircraft modification, which includes the aircraft configuration, test instrumentation, data analysis techniques, and test procedures used to perform the baseline and modified aircraft GVTs and flight flutter clearance. The measured differences in modal frequencies and mode shapes of the aircraft were sufficient to warrant a flight flutter clearance. The report includes the results of the flight tests, which consist of modal frequency and damping estimated during flight with the glove mounted on the left wing.

DESCRIPTION OF THE TEST AIRCRAFT

The F-16XL aircraft tested is the single-seat version (fig. 1) powered by a Pratt & Whitney (West Palm Beach, Florida) F100-PW-200 engine. The inboard wing leading edge is swept 70° and the outboard wing leading-edge is swept 50° . The aircraft is capable of speeds near Mach 2 and altitudes up to 60,000 ft. Inert missiles are carried on the inboard wing station for center-of-gravity ballast, and the wingtips are configured with launcher rails only (ref. 9).

The basic aircraft was modified by installing a titanium test glove that was faired to the left wing with graphite and epoxy (fig. 1). The total added weight of the modification was 207 lb. The glove design incorporated a modified NACA airfoil. The test glove extended from the forward spar on the lower wing surface around the leading edge to the 25–40 percent chord line on the upper wing surface. The glove fairing extended to the trailing edge spar on the upper surface (ref. 10).

TEST OBJECTIVES

There were two main objectives for the ground vibration and flight flutter tests of the F-16XL. The first objective was to assess the effect of the wing glove and its associated hardware on the structural characteristics of the F-16XL. The second objective was to establish a flight envelope free of any flutter or aero-servoelastic instability.

INSTRUMENTATION

Different instrumentation was used to perform these tests, depending on the purpose of the test. For vibration testing on the ground, piezoelectric accelerometers were attached to the aircraft to measure the response of the structure. Each of the 180 accelerometers had a nominal sensitivity of 1000 mV/g and weighed 3 gm. The mounting block for each accelerometer weighed approximately 10 gm and was attached to the aircraft by hot glue. The accelerometer locations are listed at the end of this paper in an appendix (table A-1 and figs. A-1 through A-4). An HP9000/380 workstation and HP3565 data-acquisition and analysis system (figs. 2(a) and 2(b)) acquired, filtered, displayed, and recorded 183 channels of data (3 force inputs and 180 accelerometer responses).

Three electrodynamic shakers capable of generating a maximum force of 150 lb were used to excite the aircraft. One shaker was placed aft on the right wing launcher rail (fig. 3); a second shaker was placed forward on the left wing launcher rail; and a third shaker was suspended from an overhead crane and attached to the vertical stabilizer (fig. 4). The vertical stabilizer shaker suspension cables were long enough to ensure that the pendulum frequency of the shaker was well below the resonant frequencies of the aircraft. The shakers were attached to the aircraft with a telescoping thrust rod, a stinger, and a force link. The force link was attached to a locking ball nut joint that was mounted to the aircraft (fig. 5).

For flight testing, the aircraft was instrumented with seven accelerometers. Figure 6 shows the locations of these accelerometers. All accelerometers were sampled at 200 samples/sec and had a range of ± 10 g, except the vertical tail which had a range of ± 25 g.

The accelerometer responses were telemetered from the aircraft to the NASA Dryden Spectral Analysis Facility for near-real-time stability monitoring. Selected accelerometers were routed to a spectrum analyzer for real-time frequency domain information during the test points. A Fourier analyzer provided near-real-time frequency and damping information for critical accelerometer responses (ref. 2). Other relevant flight information such as Mach number, altitude, and airspeed were displayed on video monitors.

TEST PROCEDURES AND DATA ANALYSIS

The procedures for conducting each test and methods of analyzing data also differed depending on the purpose of the test. The following sections describe these procedures and methods.

Ground Vibration Tests

The GVTs were conducted on an essentially flight-ready aircraft. Some equipment that was not yet installed was simulated by ballast weights placed as close to the proper locations as possible. All structural panels were fastened and the canopy closed and locked. The aircraft was on its landing gear during the test and the struts were collapsed to eliminate potential nonlinearities. The tires were deflated to one-half the normal pressure to provide a softer support. Fuel loading for both tests consisted of full fuselage tanks and empty wing tanks. The control surfaces were in the trim position for each test and potential nonlinearities caused by excessive actuator freeplay in the elevons and ailerons was minimized by suspending approximately 50 lb of lead shot from the surfaces with an elastic bungee cord. The bungee cord was used to decouple the dynamics of the lead shot from the aircraft.

Two GVTs were performed on the aircraft—one before the glove installation (baseline GVT) and a second after (modified GVT). The general procedure for each GVT was to install accelerometers on the aircraft and then connect them to a digital data-acquisition system with some signal conditioning. The aircraft was excited by three electrodynamic shakers using uncorrelated random signals with a frequency content of 1 to 50 Hz. Frequency response functions (FRFs) were estimated and subsequently used to determine the structural frequencies and mode shapes below 30 Hz.

The data were analyzed by estimating the aircraft's modal parameters of frequency, damping, and mode shape, and then by comparing the baseline and modified GVT results for significant modal changes. The identification of the modal frequencies was simplified by using all 540 FRFs (3 inputs and 180 responses) in the calculation of the multivariate mode indicator functions (MMIFs) for each configuration.

The MMIF is essentially a multi-input-multi-output formulation of the classical method of tuning normal modes. A normal mode response phase lags the sinusoidal excitation by 90° (ref. 11) at resonance, and the MMIF identifies this resonance frequency. It also identifies repeated roots. The MMIF consists of one function for each reference or excitation input to the structure. Three inputs were used to excite the F-16XL during the GVTs. The primary MMIF has minimum values at the modal frequencies. If the secondary function has significant minima corresponding to the same frequencies of the primary MMIF, this suggests the presence of repeated roots. The number of minima at a particular frequency corresponds to the multiplicity of the roots (refs. 11 and 12). The MMIF reduces the analysis time to identify the structural modes by using all 540 FRFs simultaneously rather than each individually.

The MMIFs were correlated with the individual FRFs to identify and tabulate all the modes of the aircraft. The modal parameters were estimated by a single-degree-of-freedom technique that fits a second-order polynomial to the FRFs in a selected frequency range. Then the modal parameters and mode shapes from the baseline and the modified GVTs were compared using the modal assurance criteria (MAC), which is an orthogonality check of the structural modes (ref. 12). A MAC value close to unity suggests that the modes have the same shape, and a value near zero implies that the mode shapes are independent. The GVT results also were compared with a previously existing baseline database from the aircraft manufacturer and were assessed for any unusual vibratory motion of the airplane or potential aeroelastic concerns.

Flight Test

The flight-flutter clearance was accomplished by obtaining test data at 14 test points (fig. 7) flown in order of increasing dynamic pressure over a series of three flights. At each test point, data were obtained during 60 sec of stabilized flight. Atmospheric turbulence provided structural excitation. Because of the lack of turbulence at some test points, a series of pilot-induced control surface pulses supplemented the turbulence excitation. The accelerometer responses were monitored in real time for any aircraft instabilities and were used for near-real-time modal frequency and damping calculations. These results were then evaluated before clearing the aircraft to the next test point.

Near-real-time and postflight data analysis consisted of calculating the autopower spectra. Then a frequency range of interest was identified and the rest of the spectrum was set to zero. The inversed Fourier-transformed was performed on the spectrum and an exponential window was applied. Transformation back to the frequency domain resulted in a smoothed spectrum from which a half-power method was used to estimate the structural frequency and damping (ref. 13).

Because the time available for data analysis was restricted during flight, the data were more thoroughly analyzed between flights using the same reduction techniques. Postflight analysis established confidence levels in estimated modal frequency and damping values by providing more estimates and using statistical averages and variances on the results. It also provided the opportunity for further manipulation of the data, such as addition and subtraction of wingtip sensor data to enhance symmetric and antisymmetric motion, which also aided in separating closely spaced modes.

RESULTS AND DISCUSSION

The GVT results showed close comparison of the structural frequencies and mode shapes between the baseline and modified aircraft. Some fuselage modes could not be identified because of the lack of fuselage excitation. Three significant modal frequency and mode shape changes in the control surface modes

caused some concern because of a possible control surface buzz problem. Results indicated additional flutter analyses were not necessary. The flight test results show adequate damping trends for the modes that could be identified. Some structural frequency and damping estimates could not be extracted from the response spectra because of the lack of random atmospheric turbulence for excitation at these frequencies. The pilot-induced raps and kicks did not increase excitation to improve the frequency and damping estimates. The detailed results from the ground vibration and flight-flutter tests will be covered in the following sections.

Ground Vibration Tests

The MMIFs (figs. 8 and 9) from the baseline and modified aircraft identified 14 to 15 modes between 5 and 30 Hz. Only the primary and secondary MMIFs are shown from each GVT. The baseline MMIF (fig. 8) shows 11 distinct modes up to 25 Hz. Four modes between 25 and 30 Hz are not as distinct but are present. The secondary MMIF in the baseline MMIF shows a distinct frequency drop corresponding to the same frequency of 7.9 Hz as the primary MMIF, which suggests the presence of a repeated root. The modified aircraft MMIF shows nine modes between 5 and 25 Hz. Again the four modes between 25 and 30 Hz are present but not as distinguishable as the other nine modes. No repeated roots were estimated. Table 1 summarizes the structural frequencies from the MMIF.

Table 1. Multimode indicator function (MMIF) structural frequencies.

| Baseline aircraft GVT | | Modified aircraft GVT |
|-----------------------|-----------|-----------------------|
| Primary | Secondary | |
| 7.9 | 7.9 | 8.0 |
| 9.8 | | 9.7 |
| 10.7 | | 10.8 |
| 12.4 | | 12.5 |
| 13.2 | | 13.2 |
| 13.6 | | 13.6 |
| 16.2 | | 20.5 |
| 18.6 | | 21.7 |
| 20.2 | | 23.9 |
| 21.7 | | 25.3 |
| 22.2 | | 26.5 |
| 26.4 | | 27.6 |
| 27.6 | | 28.5 |
| 28.8 | | |

The structural frequencies identified from the MMIF were correlated with the FRFs from the baseline and modified aircraft GVTs. Figures 10–12 show the driving point FRFs from both GVTs. These three FRFs show little change in frequency between the two GVTs. There are slight frequency shifts below 15 Hz, which is to be expected because of the added mass of the glove. These frequency shifts become greater above 15 Hz, as is shown in the right-wing FRF (fig. 11).

The individual FRFs do not show all the structural frequencies that can be seen in the MMIF. The baseline MMIFs show three modes at 9.6, 16.2, and 18.6 Hz that are not present in the FRFs. The double root calculated in the baseline MMIF and several structural frequencies above 20 Hz also are not seen in the FRFs. Using the MMIF, therefore, can greatly simplify the identification of structural frequencies.

Modal parameter estimation identified 12 structural frequencies and mode shapes. A comparison of frequencies estimated from the baseline and modified aircraft is shown in Table 2. The third column in the table shows the MAC value between the baseline and modified GVT mode shape results. Figures 13–24 show the mode shapes for the baseline and modified GVTs.

Table 2. Baseline and modified GVT frequency comparison and MAC values.

| Mode name | Baseline GVT frequency, Hz | Modified GVT frequency, Hz | MAC mode comparison |
|--------------------------------------|----------------------------|----------------------------|---------------------|
| Symmetric wing bending | 7.975 | 8.037 | 0.990 |
| Symmetric launcher rail bending | 13.695 | 13.885 | 0.996 |
| Symmetric control surface mode 1 | 21.738 | 21.525 | 0.838 |
| Symmetric control surface mode 2 | 26.423 | | |
| Antisymmetric wing bending | 10.793 | 10.895 | 0.991 |
| Vertical tail bending | 12.480 | 12.555 | 0.993 |
| Antisymmetric launcher rail bending | 13.242 | 13.233 | 0.948 |
| Antisymmetric control surface mode 1 | 20.359 | 20.569 | 0.807 |
| Antisymmetric control surface mode 2 | 22.194 | 23.986 | 0.488 |
| Antisymmetric control surface mode 3 | 27.049 | 27.811 | 0.817 |
| Antisymmetric control surface mode 4 | 28.776 | 28.650 | 0.295 |
| Asymmetric control surface mode 1 | 27.169 | 26.616 | 0.808 |

The three mode shapes at 9.6, 16.2, and 18.6 Hz and the double root estimated from the MMIF are not shown in Table 2. These modes were identified as fuselage bending modes from the manufacturer's GVT data and flight tests (refs. 14–16). Adequate mode shapes could not be estimated for these structural frequencies because of the lack of excitation on the fuselage during the baseline and modified aircraft GVTs.

The frequency and mode shapes that could be identified show very little change between the baseline and modified GVTs. The fundamental aircraft modes, such as first symmetric and antisymmetric wing bending, show about a 1-percent change in frequency and the MAC values are 0.99 and above. Although

most of the GVT data show close agreement between the baseline and modified GVT, three significant differences in the control surface modes may be noted.

The first difference is the absence of a 26.4-Hz symmetric control surface mode in the modified aircraft GVT data. Figure 16 shows the baseline mode shape. The absence of this mode in the modified aircraft data is likely a result of the changes in the wing mass and stiffness caused by the addition of the glove. Figure 16 shows that the control surface mode has considerable deflection at the wing leading edge and inboard wing area. The glove covers this area of the wing and its mass and stiffness substantially reduce the modal response to the control surface deflections.

The second difference was identified in the second antisymmetric control surface mode. The data in Table 2 indicate an 8-percent shift in frequency from 22.2 to 24.0 Hz and a poor mode shape comparison. Figure 21 shows the mode shape. As was seen in the symmetric 26.4 Hz control surface mode, this mode has significant inboard wing motion on both the right and left wings. Again, the addition of the glove is in an area where the baseline GVT showed significant deflections. The total effect in the modified aircraft is stiffening, thereby reducing the deflection and increasing the frequency. The differences in the mode shapes are reflected in the MAC comparison. The change in mode shape was restricted to the glove area, so the vertical stabilizer and the fuselage motion remained unchanged.

The third and final difference in the modal data was observed in the fourth antisymmetric control surface mode (fig. 23). The mode shape comparison shows a low MAC value of 0.295. The mode shape is asymmetric now but originally was antisymmetric. One possible explanation is that the 26.4-Hz symmetric mode (fig. 16) was shifted up to 28 Hz because of the glove and coupled with the 28.8-Hz antisymmetric mode. The distinct changes in mode shape before and after the modification resulted in the low MAC value.

A review of the GVT data showed no change in frequency in the range where the structural notch filters were active in the flight control system. Therefore, there were no aeroservoelastic concerns for this modification to the aircraft.

Flutter Analysis

The flutter analysis data from the manufacturer of the unmodified F-16XL aircraft (table 3) shows the antisymmetric flutter frequencies for the different fuel and wingtip store configurations range from 23.5 to 29.2 Hz (ref. 16). For the specific launcher-rails-only configuration, the flutter frequencies range from 23.5 to 25.3 Hz. Figure 25 shows the manufacturer's analysis and flight test points. The flutter speeds for these configurations were predicted to be outside the structural design limits of the aircraft, so no new flutter analysis was completed on the modified F-16XL.

The addition of the glove affected the control surface modes above 20 Hz, which were predicted to have the lowest flutter speeds by the flutter analysis performed during the design of the F-16XL. Changes in the control surface modes raised concerns about a control surface buzz which occurs in the transonic flight region for most aircraft. These changes and concerns coupled with the fact that the launcher-rails-only configuration was never flight-tested for flutter were important in planning the test requirements of the modified aircraft.

Flight Test

During the original flight flutter clearance of the F-16XL only two wingtip configurations were flown: clean tip and launcher rail with missiles. These configurations were cleared to a maximum dynamic pressure of 1700 lb/ft². The clean tip was also flown to a maximum of 1.6 Mach at 30,000 ft. Figure 25 shows the maximum speeds flown during the first flutter clearance of the F-16XL at several altitudes. All test points were flown outside the NASA-desired flight envelope. The glove program consists of a launcher-rails-only configuration, which was not flight-tested.

Flutter data were acquired at 25,000 and 38,000 ft with Mach numbers ranging from 0.70 to 1.8. Figures 26–38 show the accelerometer response spectrums for Mach 0.90 at both test altitudes. Figures 39–49 are plots of the frequency and damping estimates as functions of Mach number. Trends for frequency and damping were only clear for six structural modes. The missing frequency and damping data could not be extracted from the response spectra because of the lack of random atmospheric turbulence for excitation at these frequencies even with the pilot-induced raps and kicks. The accelerometer spectra show some energy was imparted in the 20-Hz range (figs. 27–31). However, individual modes above 15 Hz were impossible to distinguish because of the noise and a lack of clean excitation in the modal frequency range. This was a concern, since the original aircraft flutter analysis showed that the antisymmetric modes above 20 Hz exhibited the lowest flutter speeds and the GVT results showed significant change with these structural frequencies. Although the energy imparted above 15 Hz was small and damping values and trends could not be established, it was felt that monitoring accelerometer responses on the strip charts would allow flutter testing to proceed safely.

The modal frequency and damping estimates were satisfactory. In figure 41 an adverse trend is evident at Mach 1.1 and above. The real-time monitoring of these modes did not indicate that a structural instability was near. The damping values are considered conservative using atmospheric turbulence as the only excitation. In reference 17, an experiment comparing forced structural excitation with random atmospheric turbulence showed that random atmospheric turbulence produced damping values that were lower by about a factor of 2.

The envelope cleared for the experiment was an airspeed of 400 knots up to an altitude of 32,000 ft, then a maximum speed of 605 knots through 38,000 ft, and finally a maximum speed of 1.75 Mach above 38,000 ft. This slightly smaller envelope from the project envelope was given because it is easier for a pilot to maintain airspeed than dynamic pressure. Figure 45 shows this envelope.

CONCLUDING REMARKS

The F-16XL aircraft was modified by mounting a titanium glove on the left wing. As a result of the modification, the possibility of an aeroelastic or aeroservoelastic instability existed. To alleviate the concern, several tests were performed to study the effects of the glove on the aircraft's structural dynamics.

A ground vibration test was performed on the aircraft before and after the glove installation on the left wing to determine the effects of the stiffness and mass change on the modal characteristics. The results showed that the modal frequencies and mode shapes below 20 Hz did not significantly change. Above 20 Hz, several modes that involved the wing control surface motion were significantly changed.

The flight flutter test showed that the aircraft was free from any aeroelastic and aeroservoelastic instabilities within the flight envelope. Insufficient in-flight structural excitation prevented the identification and tracking of fuselage modes and several critical structural modes above 15 Hz. The stability of the structural modes for which frequency and damping could not be determined was maintained through real-time monitoring of the accelerometer responses. In spite of this lack of excitation, a safe and efficient flight flutter clearance program was accomplished.

*Dryden Flight Research Facility
National Aeronautics and Space Administration
Edwards, California, April 12, 1993*

REFERENCES

1. Kehoe, Michael W., *Aircraft Ground Vibration Testing at NASA Ames-Dryden Flight Research Facility*, NASA TM-88272, July 1987.
2. Kehoe, Michael W., *Aircraft Flutter Testing at the NASA Ames-Dryden Flight Research Facility*, NASA TM-100417, May 1988.
3. Kehoe, Michael W., *Flutter and Aeroservoelastic Clearance of the X-29A Forward-Swept Wing Airplane*, NASA TM-100447, Sept. 1989.
4. Kehoe, Michael W., *Flutter Clearance of the F-14 Variable-Sweep Transition Flight Experiment Airplane - Phase 1*, NASA TM-88287, Sept. 1987.
5. Freudinger, Lawrence C. and Michael W. Kehoe, *Flutter Clearance of the F-14A Variable-Sweep Transition Flight Experiment Airplane - Phase 2*, NASA TM-101717, July 1990.
6. Cazier, F.W. Jr. and M.W. Kehoe, *Ground Vibration Test of an F-16 Airplane With Modified Decoupler Pylons*, NASA TM-87634, Apr. 1986.
7. Freudinger, Lawrence C., *Flutter Clearance of the F-18 High-Angle-of-Attack Research Vehicle With Experimental Wingtip Instrumentation Pods*, NASA TM-4148, Oct. 1989.
8. Kehoe, Michael W. and Joseph F. Ellison, *Flutter Clearance of the Schweizer 1-36 Deep-Stall Sailplane*, NASA TM-85917, Aug. 1985.
9. Bensinger, C.T., "F-16XL Flight Flutter Tests," General Dynamics 400PR100, July 20, 1983.
10. Anderson, Bianca T. and Marta Bohn-Meyer, *Overview of Supersonic Laminar Flow Control Research on the F-16XL Ships 1 and 2*, NASA TM-104257, Oct. 1992.
11. Williams, R., J. Crowley, and H. Vold, "The Multivariate Mode Indicator Function in Modal Analysis," Third International Modal Analysis Conference, Jan. 1985.

12. I-DEAS Test User's Guide, Structural Dynamics Research Corporation, 1990.
13. Craig, Roy R., "Structural Dynamics: An Introduction To Computer Methods," John Wiley & Sons Inc., New York, 1981.
14. Adams, R.S. and J.C. Elrod, "F-16XL Ground Vibration Test No. 2 (Air-To-Ground)," General Dynamics 400PR083, December 20, 1982.
15. Adams, R.S. and J.C. Elrod, "F-16XL Ground Vibration Test No. 1 (Air-To-Air)," General Dynamics 400PR066, July 9, 1982.
16. Ellis, J.A., "Flutter Analysis of F-16XL Air-To-Air Configurations," General Dynamics 400PR062, June 28, 1982.
17. Vernon, Lura, *In-flight Investigation of a Rotating Cylinder-Based Structural Excitation System for Flutter Testing*, NASA TM-4512, June 1993.

ORIGINAL PAGE
BLACK AND WHITE PHOTOGRAPH



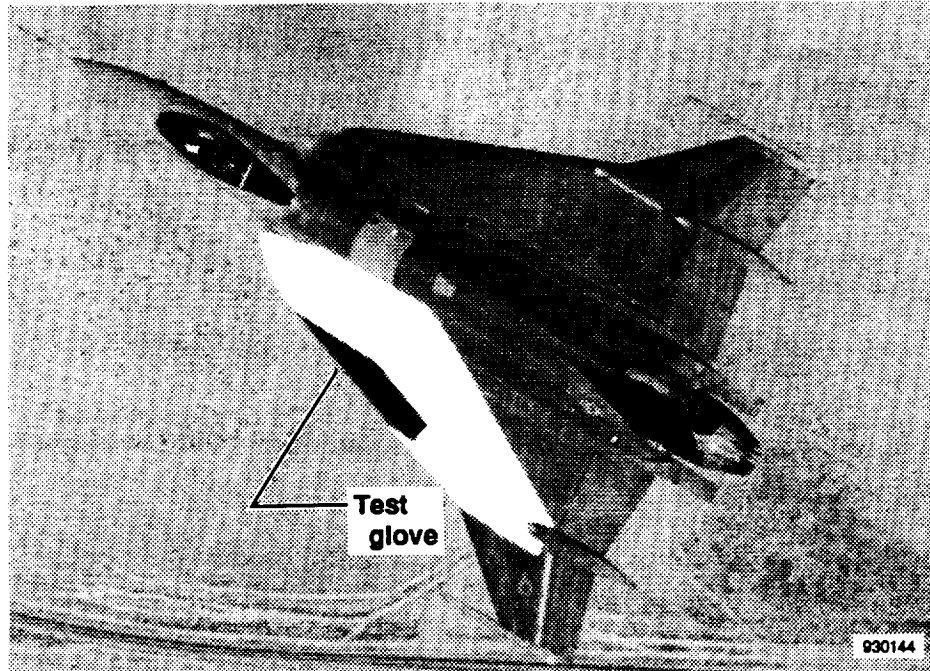


Figure 1. NASA F-16XL single-seat aircraft with the test glove installed on the left wing.

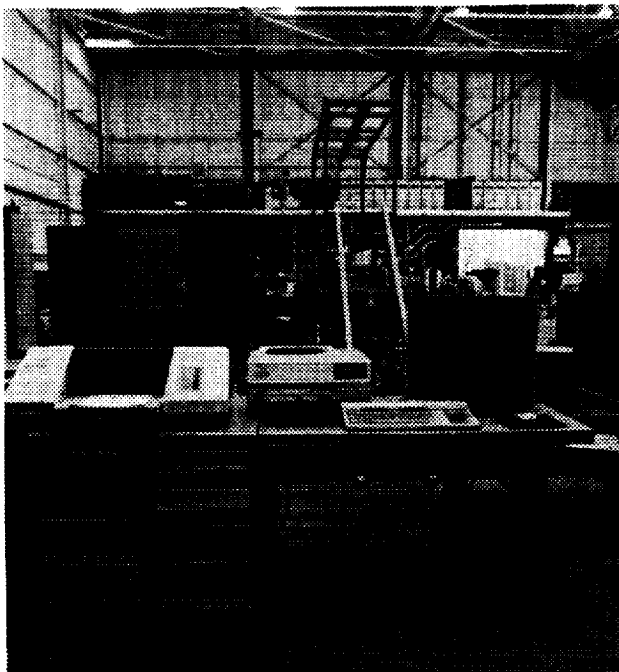


(a) The HP9000/380 workstation.

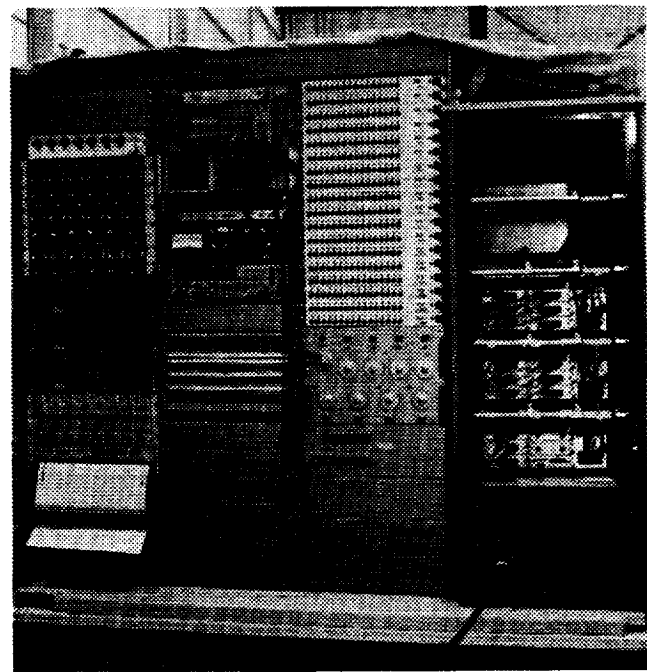

(b) The HP3565 data-acquisition and analysis system.


Figure 2. Structural analysis test system.

ORIGINAL PAGE
BLACK AND WHITE PHOTOGRAPH

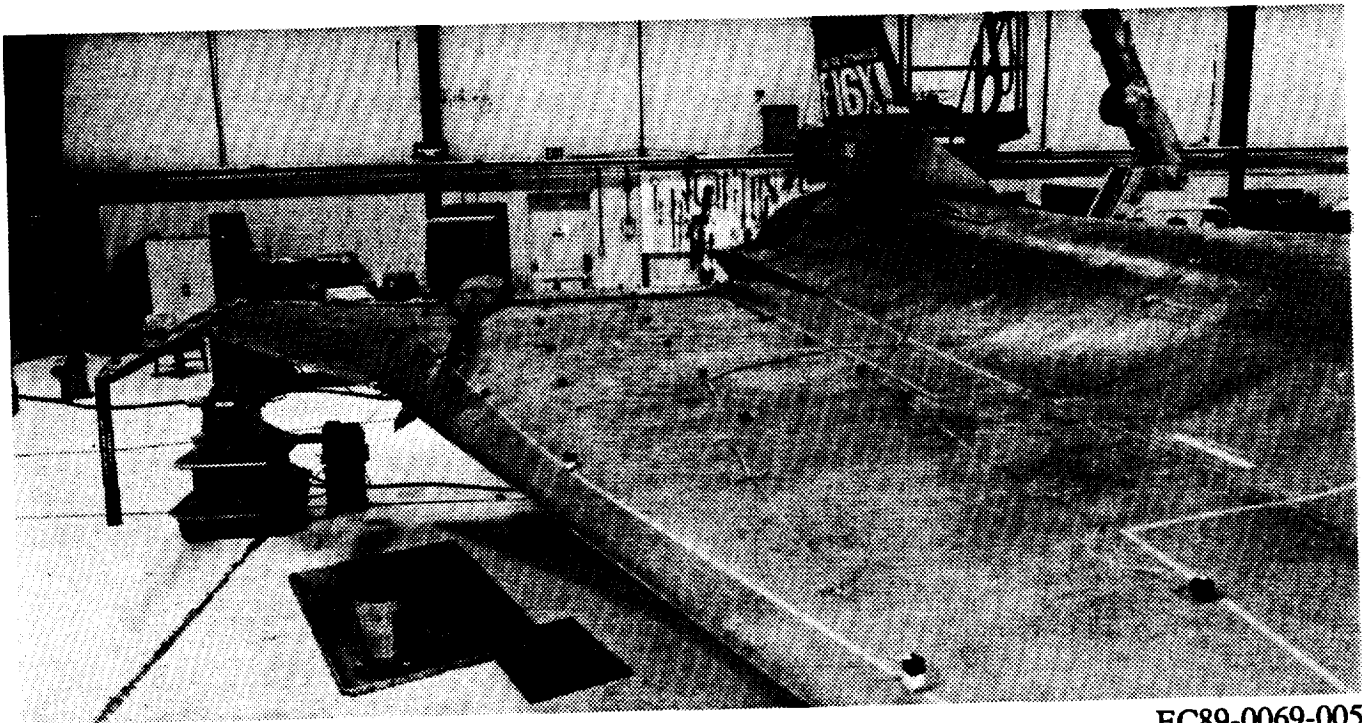

EC89-0069-005

Figure 3. GVT right-wing setup.

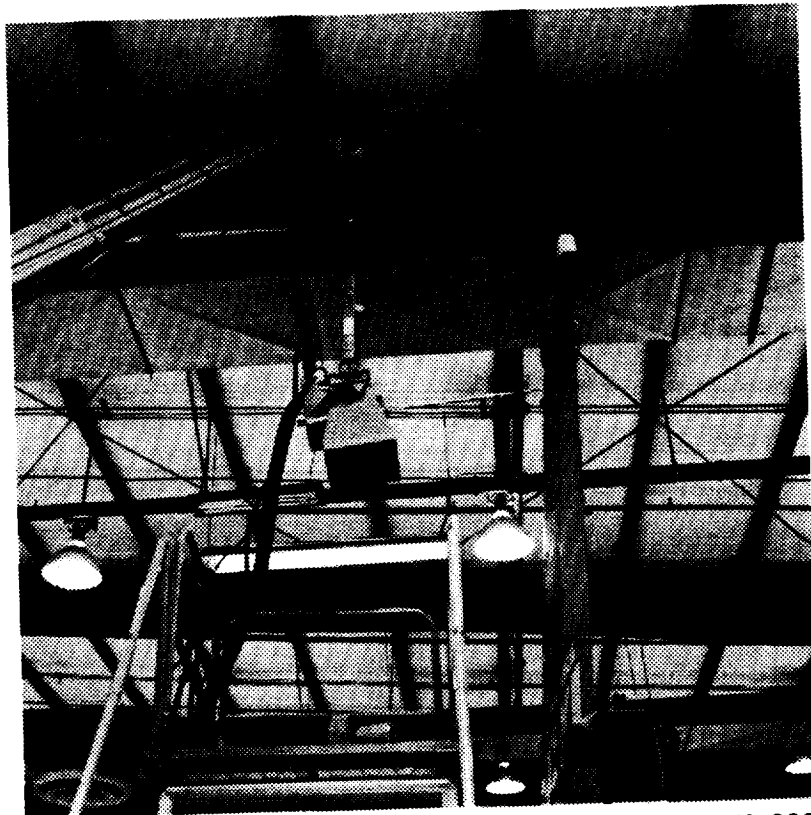

EC89-0069-003

Figure 4. GVT vertical-tail setup.

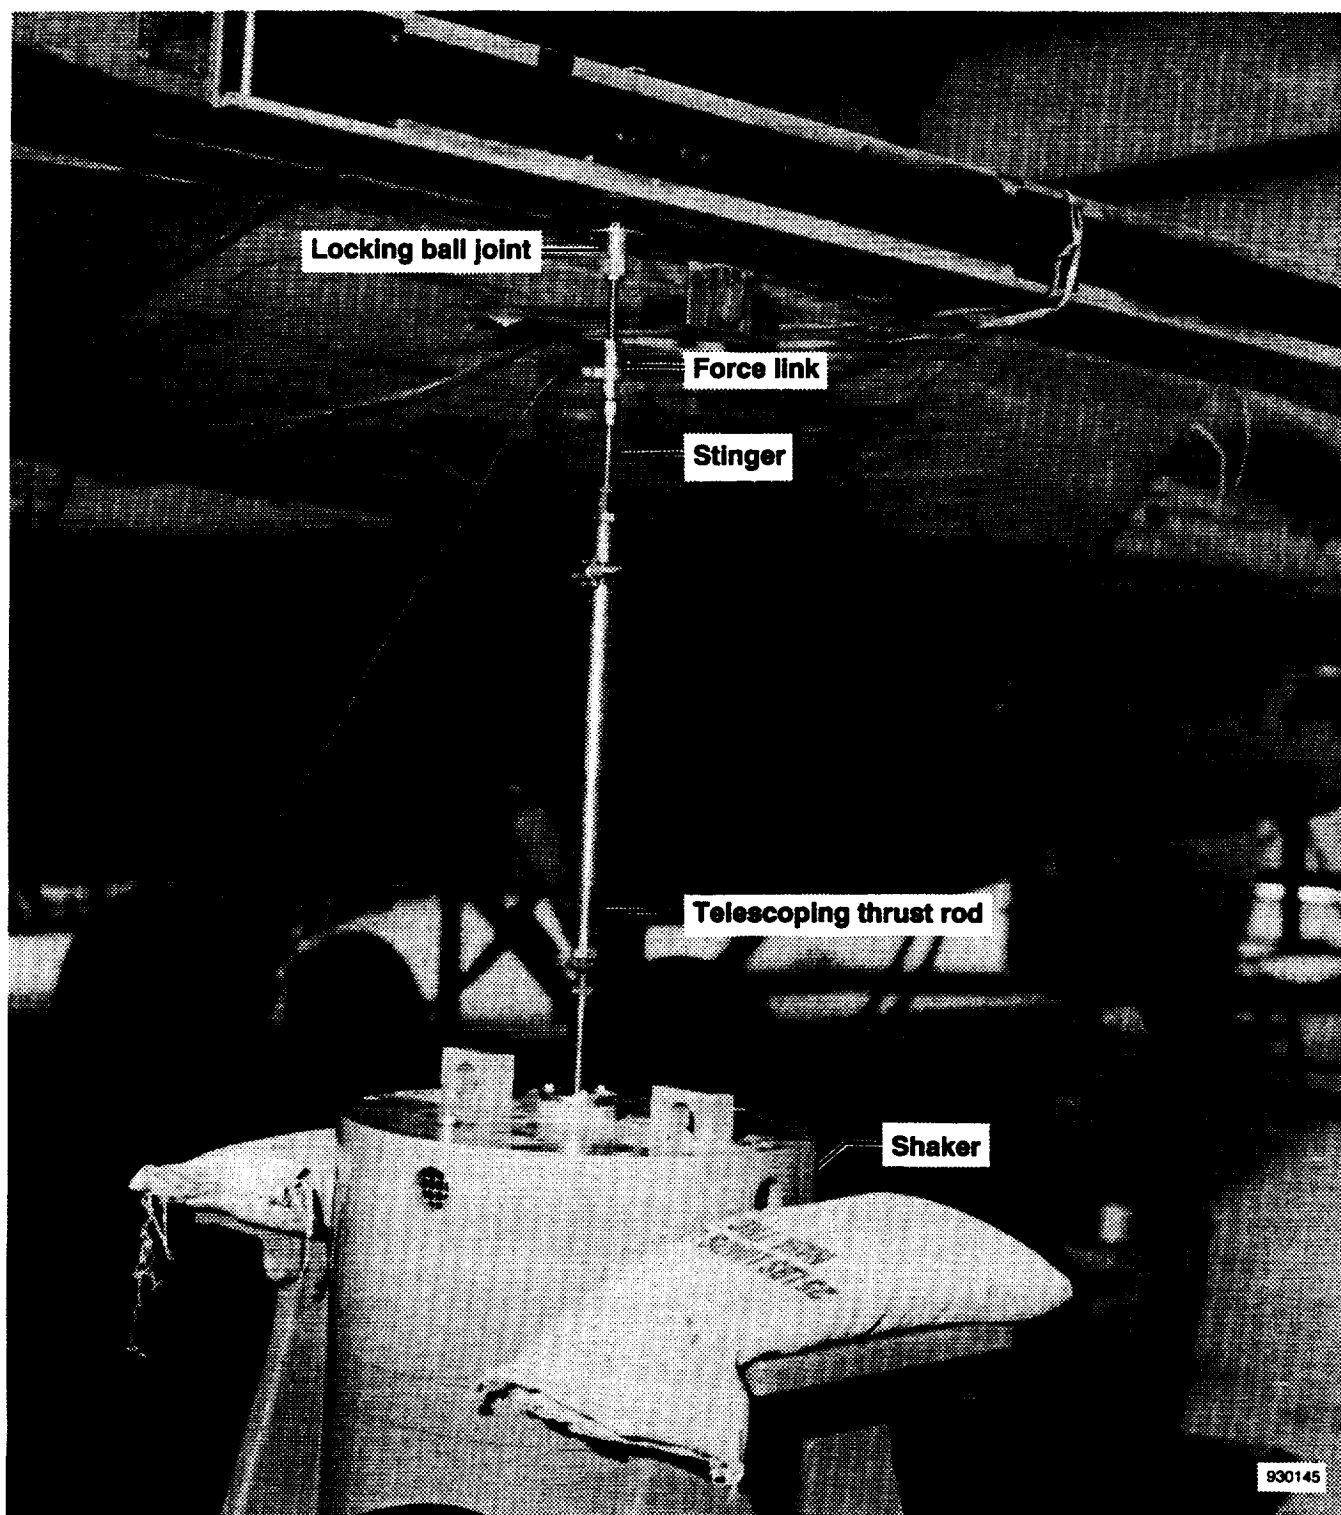


Figure 5. GVT excitation shaker setup.

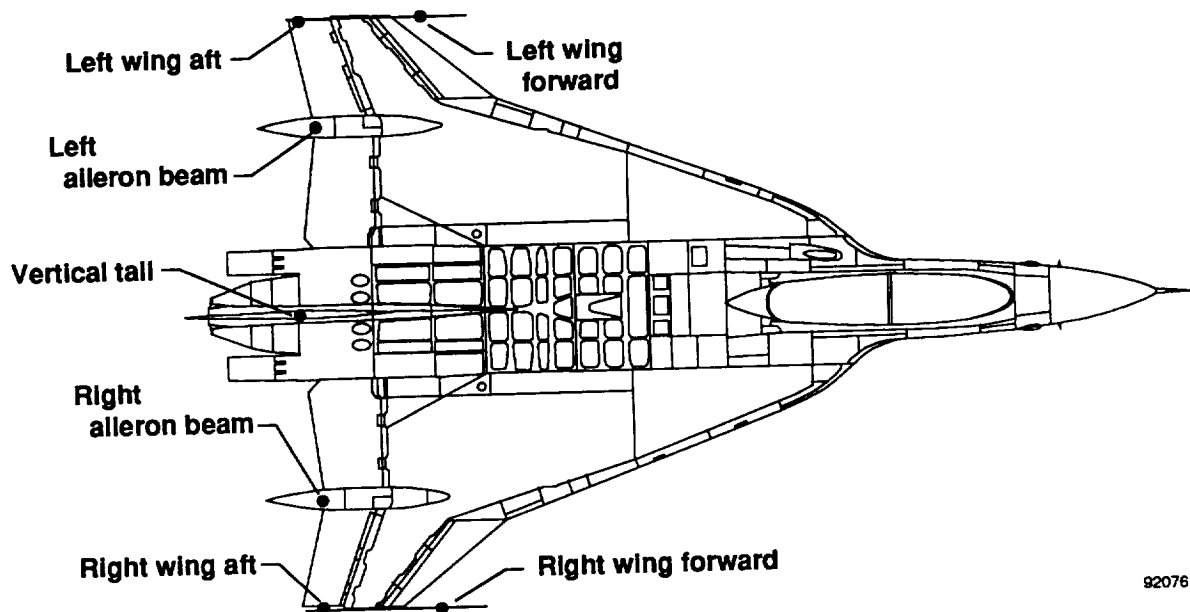


Figure 6. Flight test acceleromoter locations.

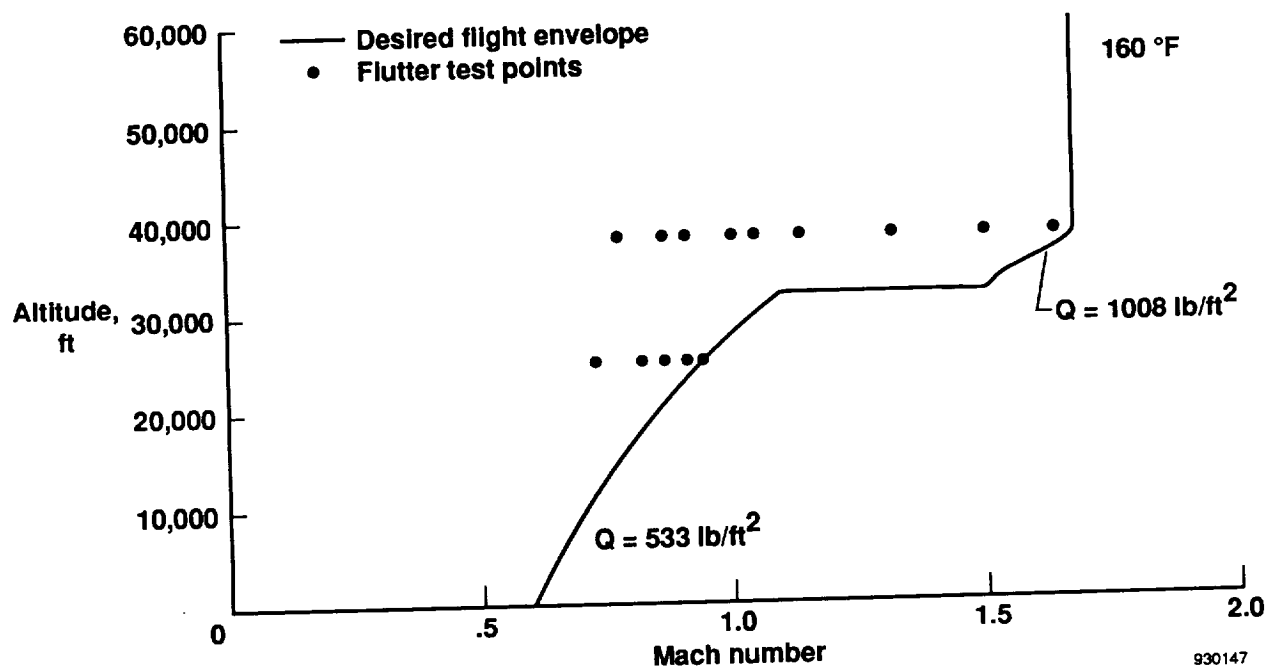


Figure 7. Flight flutter test points and desired flight envelope.

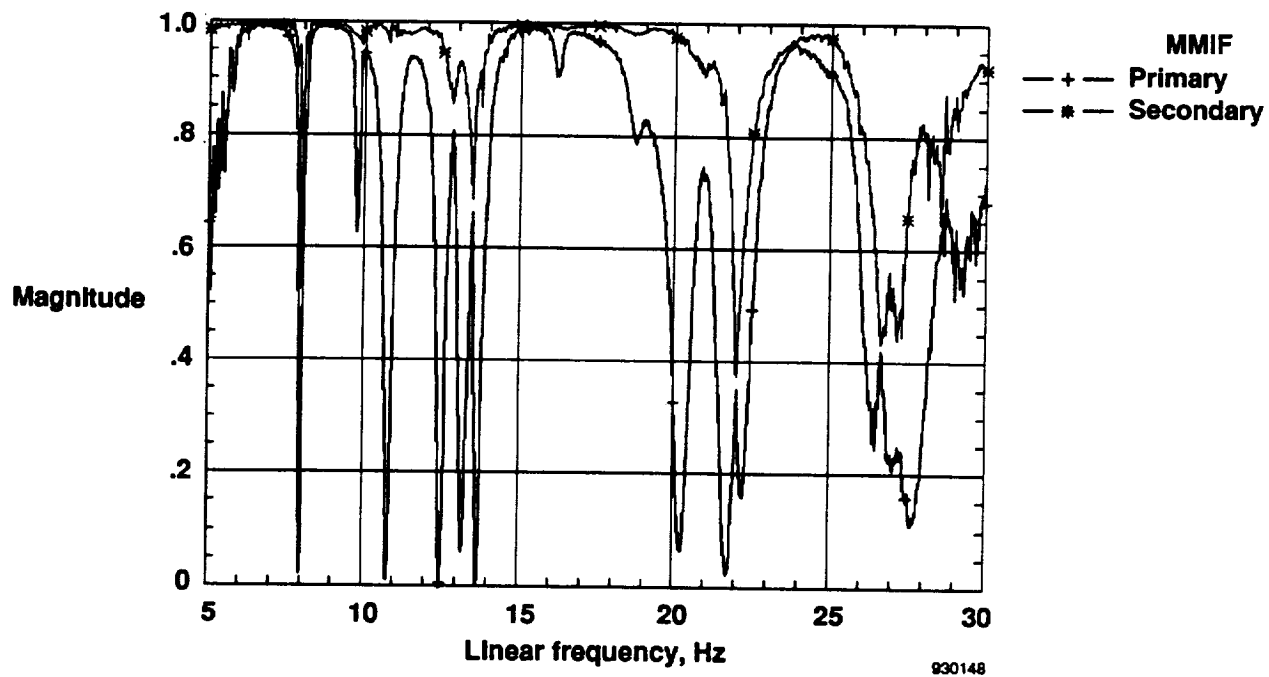


Figure 8. Baseline aircraft MMIF.

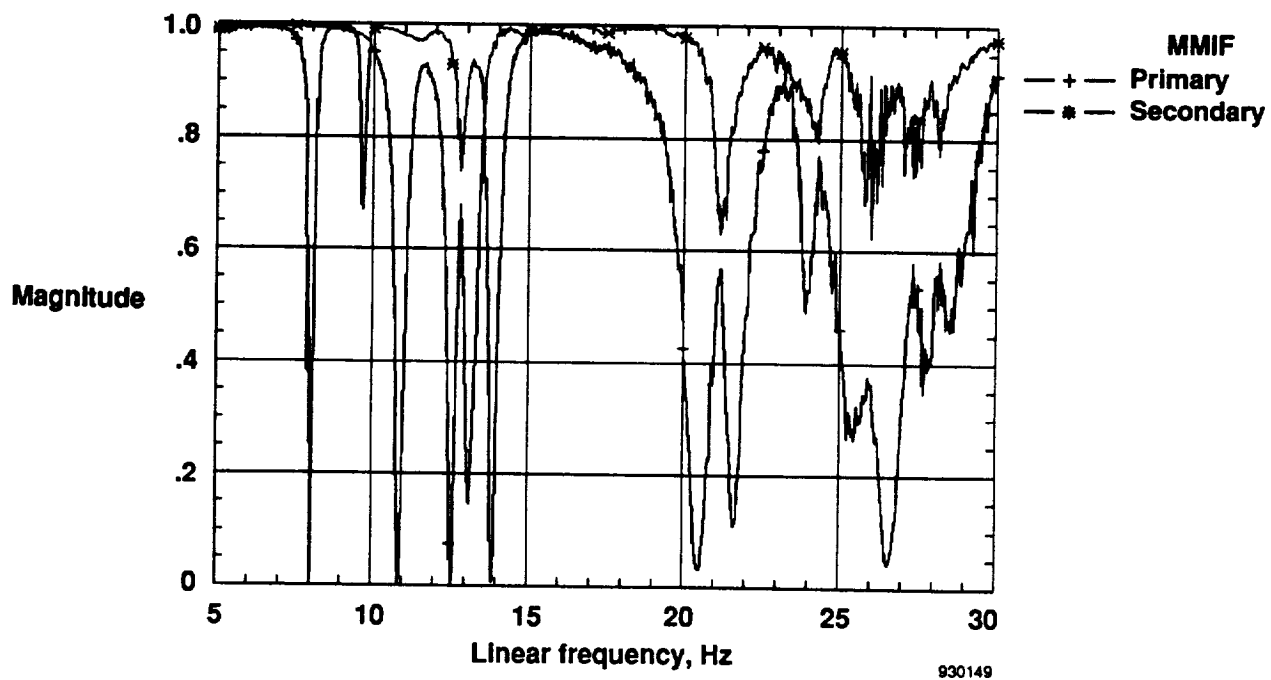


Figure 9. Modified aircraft MMIF.

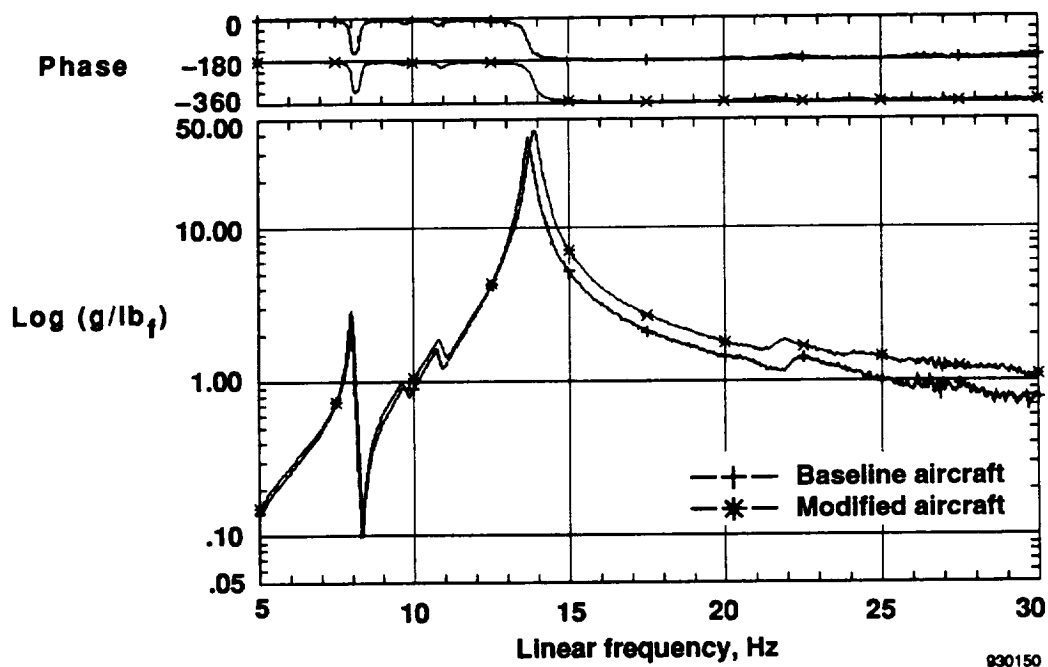


Figure 10. Left-wing driving point accelerometer FRF.

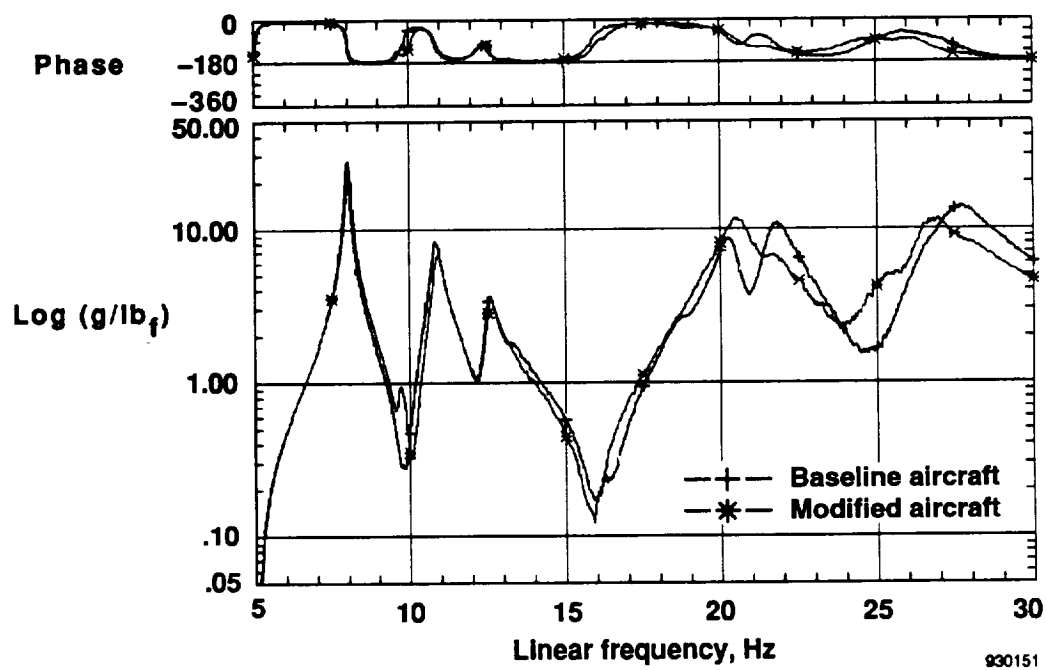


Figure 11. Right-wing driving point accelerometer FRF.



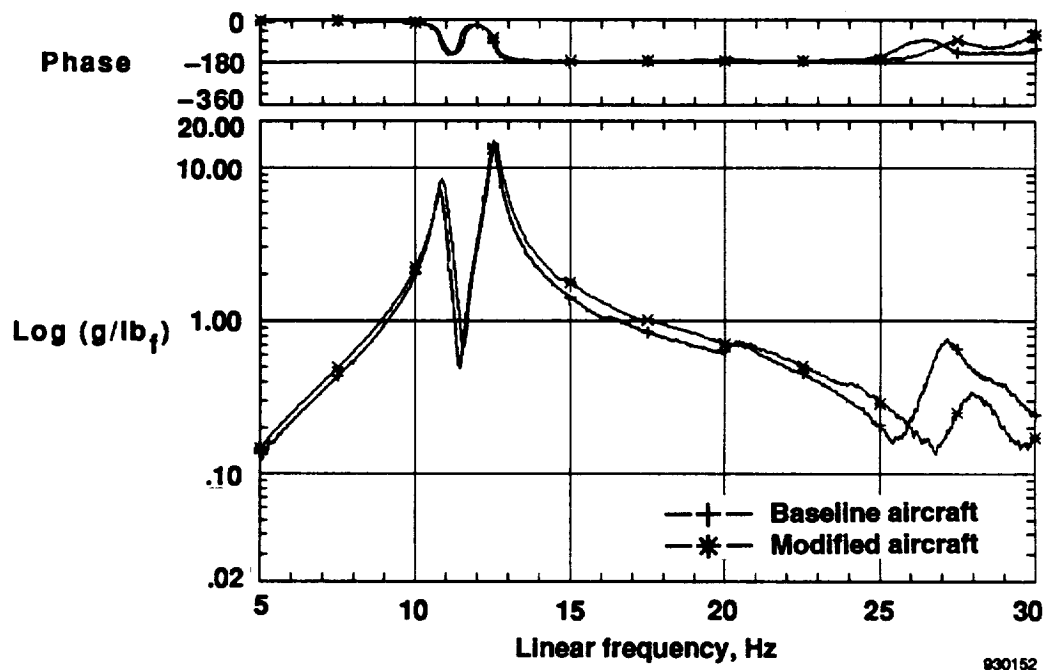


Figure 12. Vertical-tail driving point accelerometer FRF.

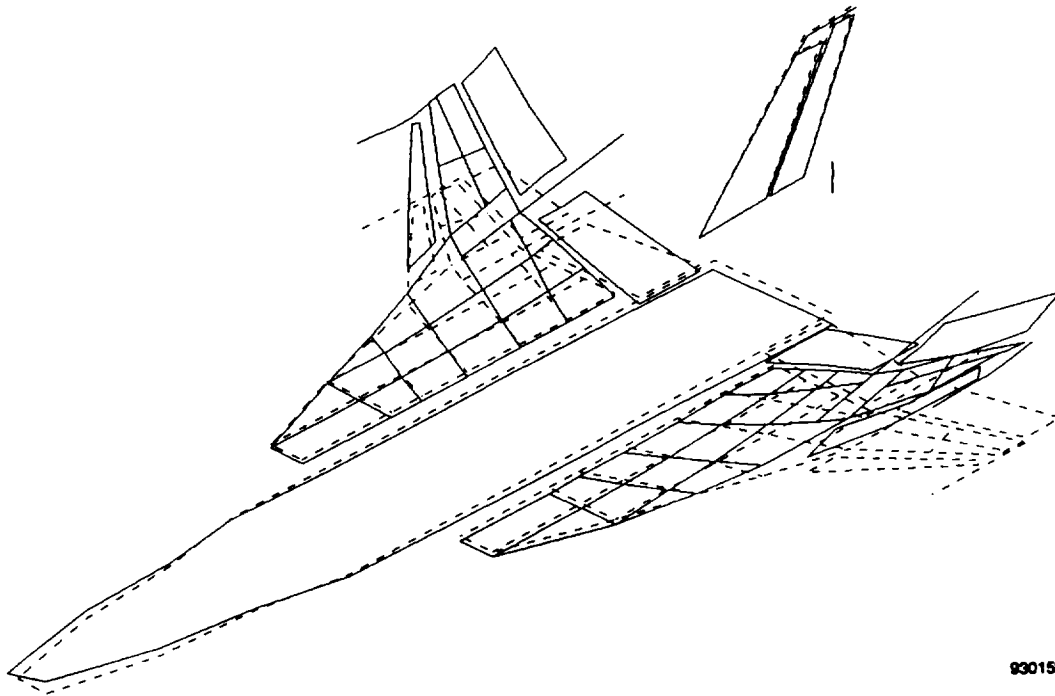


(a) Baseline, 7.98 Hz.

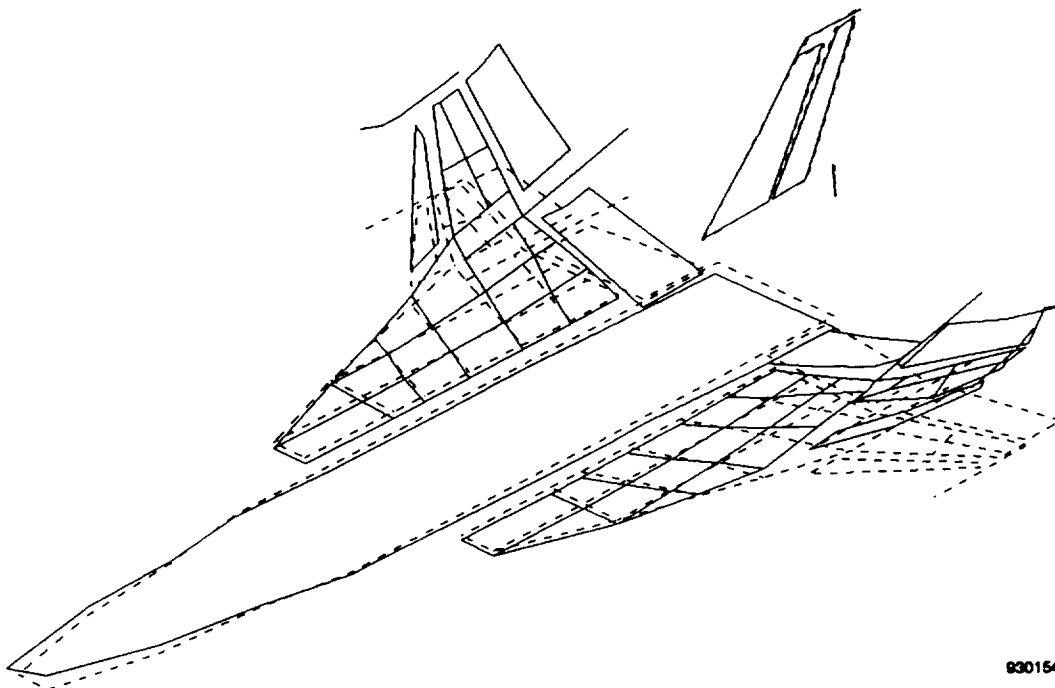


(b) Modified, 8.04 Hz.

Figure 13. Aircraft mode shapes, symmetric wing bending.

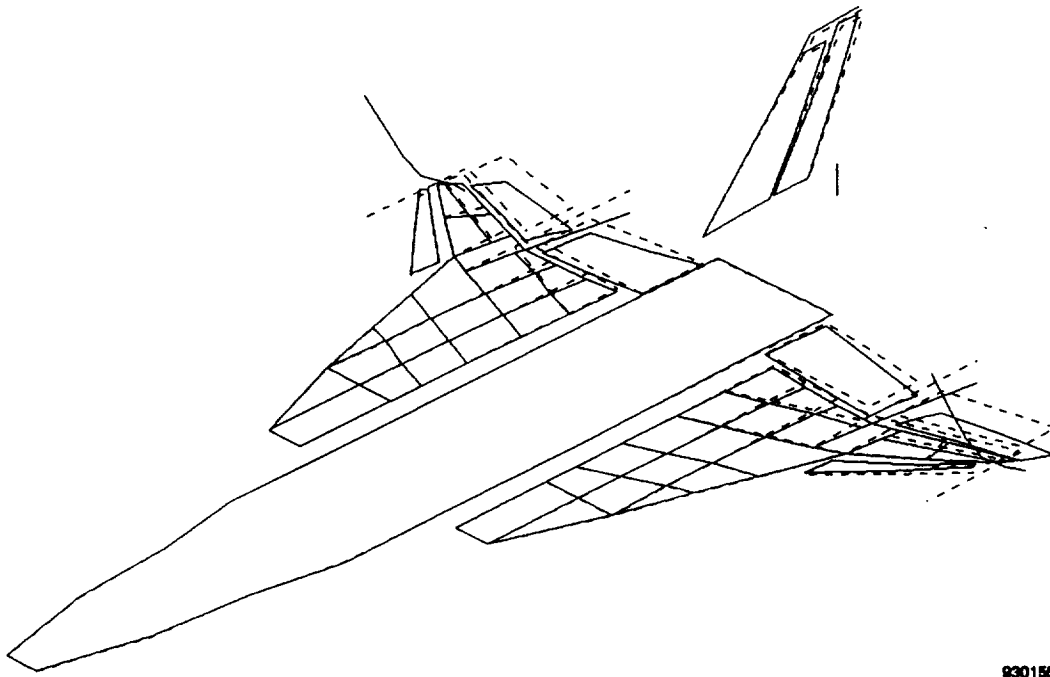

930155


(a) Baseline, 13.69 Hz.

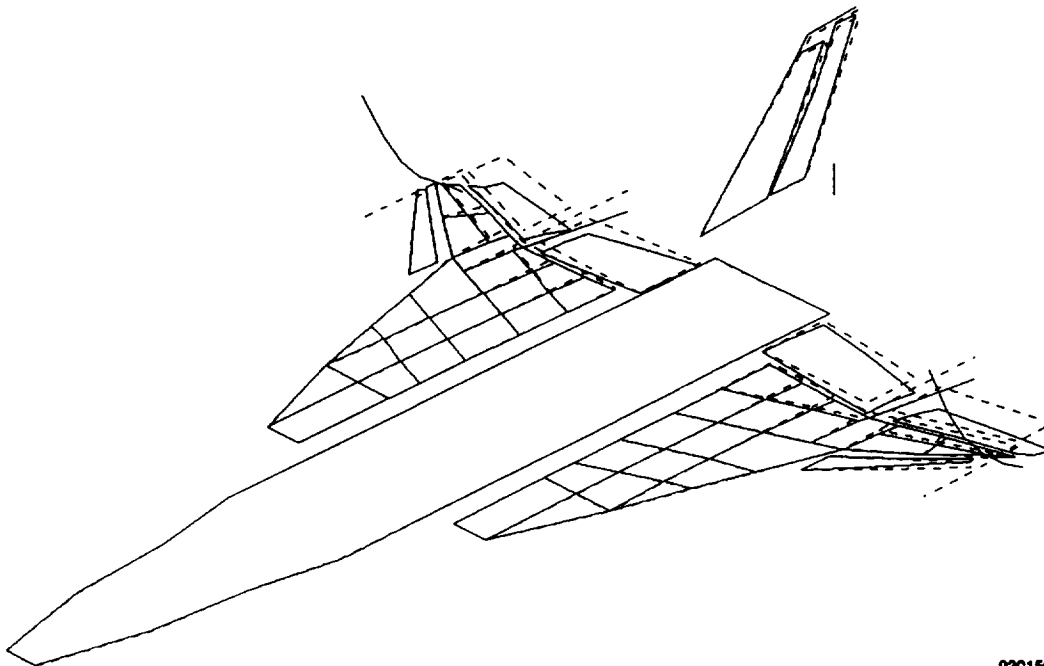

930156


(b) Modified, 13.88 Hz.

Figure 14. Aircraft mode shapes, symmetric launcher rail bending.

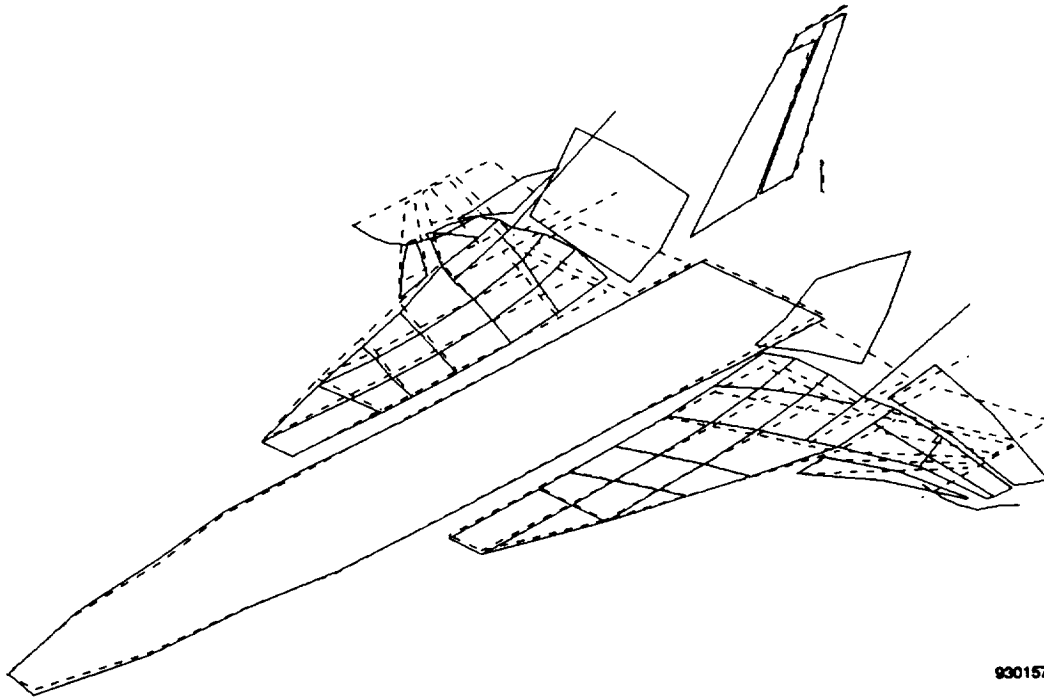

930157


(a) Baseline, 21.74 Hz.

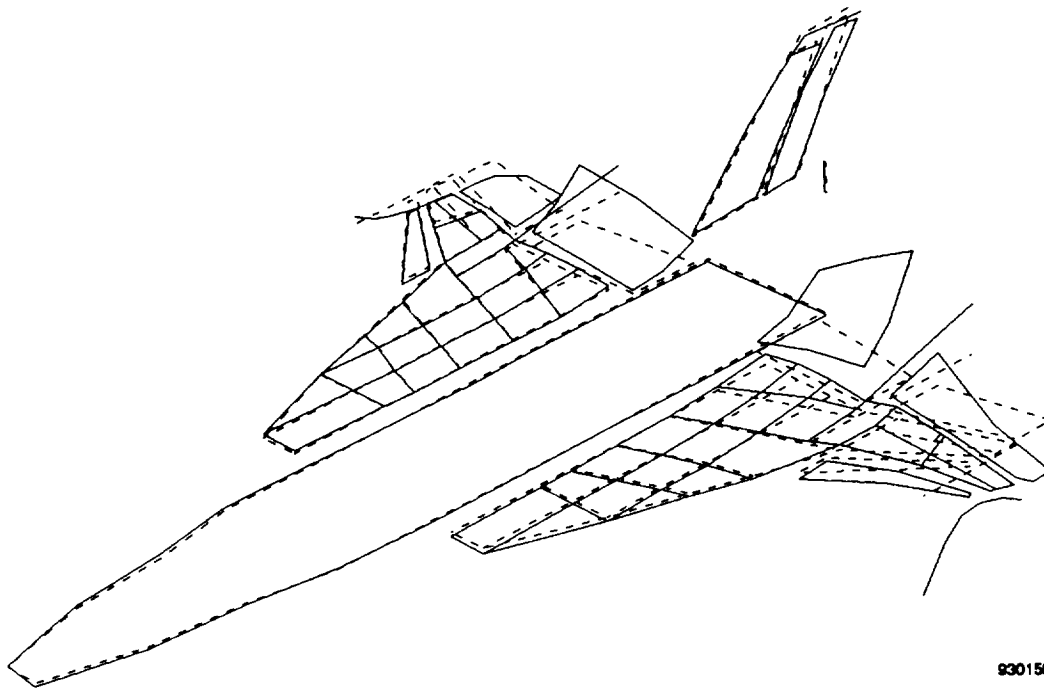

930158

(b) Modified, 21.53 Hz.

Figure 15. Aircraft mode shapes, symmetric control surface mode 1.

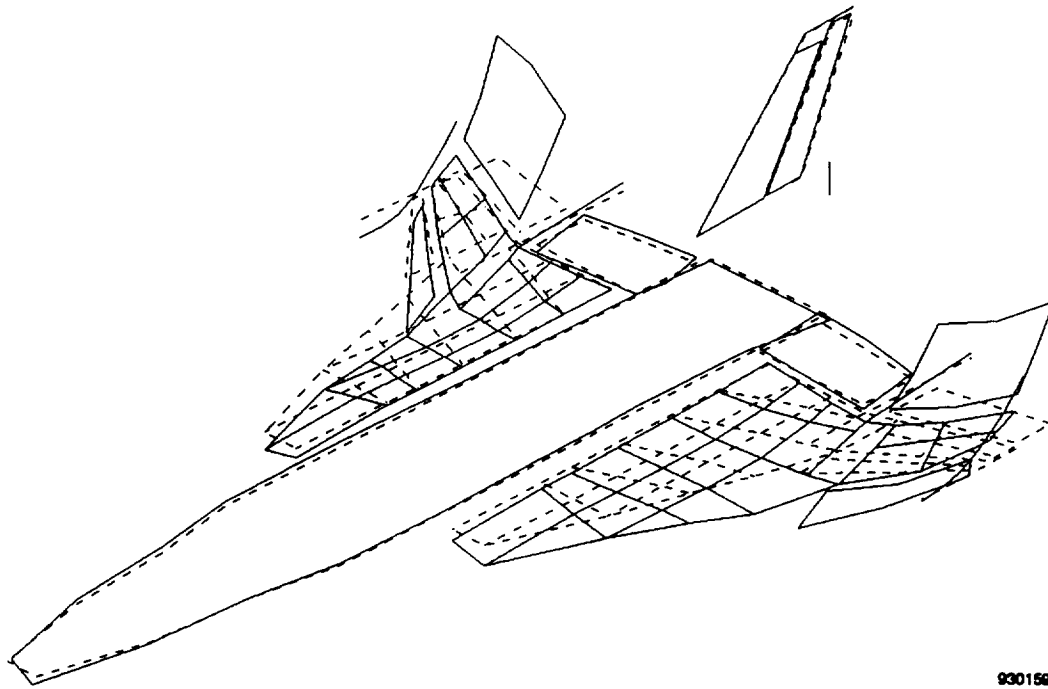


(a) Baseline, 26.42 Hz.

930159


Mode shape could not be estimated.

(b) Modified.

Figure 16. Aircraft mode shapes, symmetric control surface mode 2.

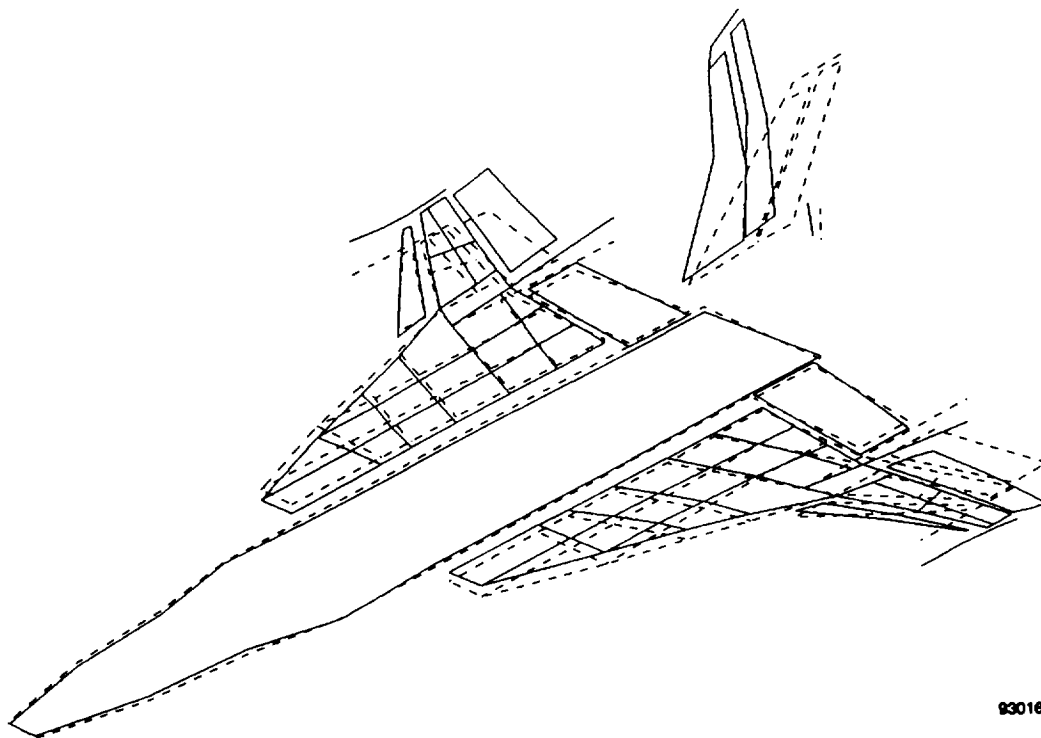


(a) Baseline, 10.79 Hz.

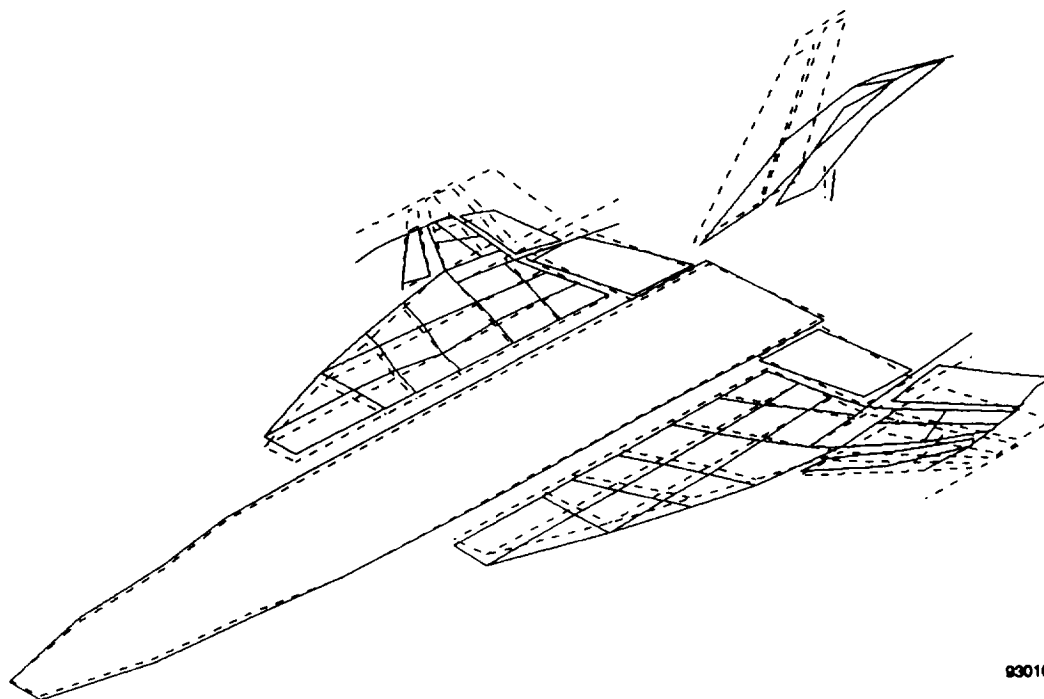


(b) Modified, 10.90 Hz.

Figure 17. Aircraft mode shapes, antisymmetric wing bending.

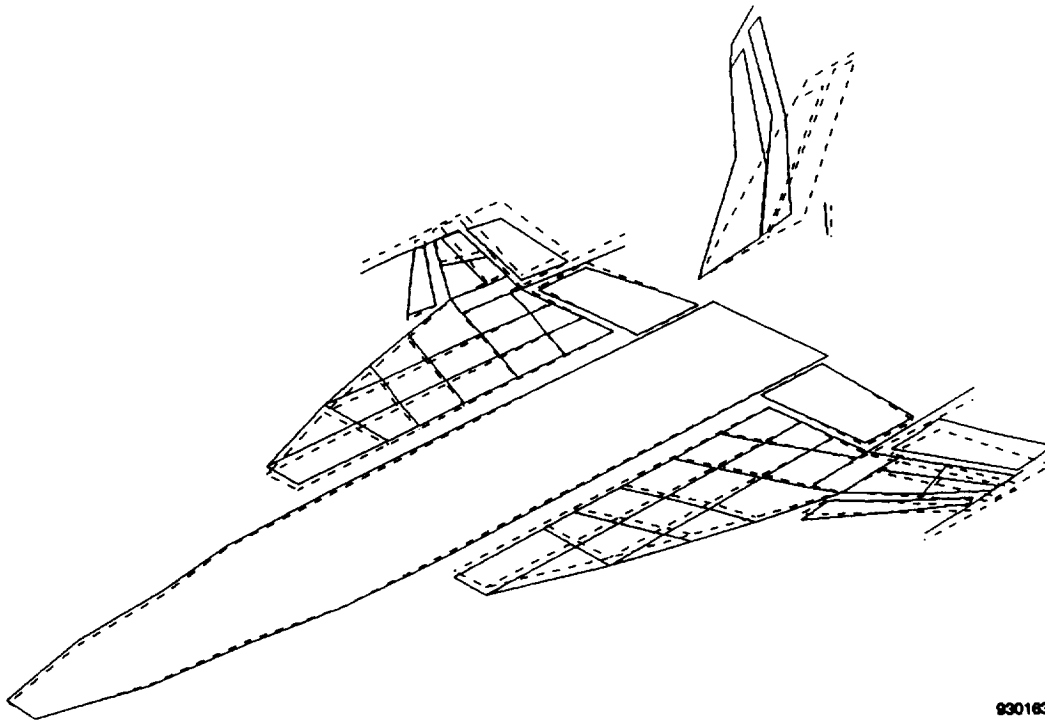

930163


(a) Baseline, 12.48 Hz.

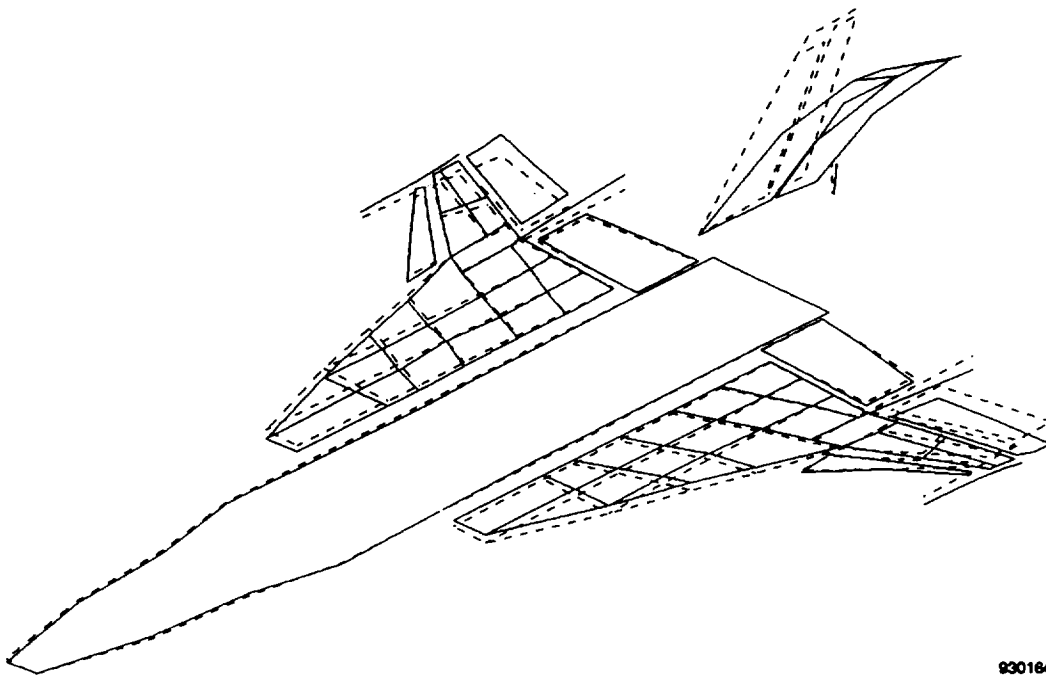

930164


(b) Modified, 12.56 Hz.

Figure 18. Aircraft mode shapes, vertical tail bending.

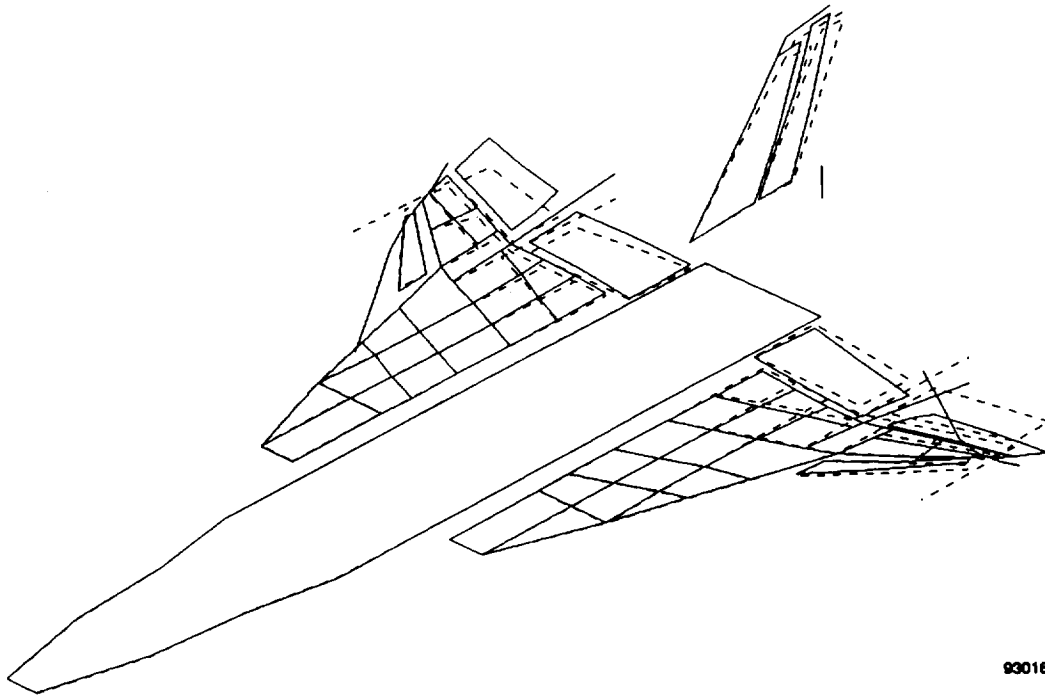

930185


(a) Baseline, 13.24 Hz.

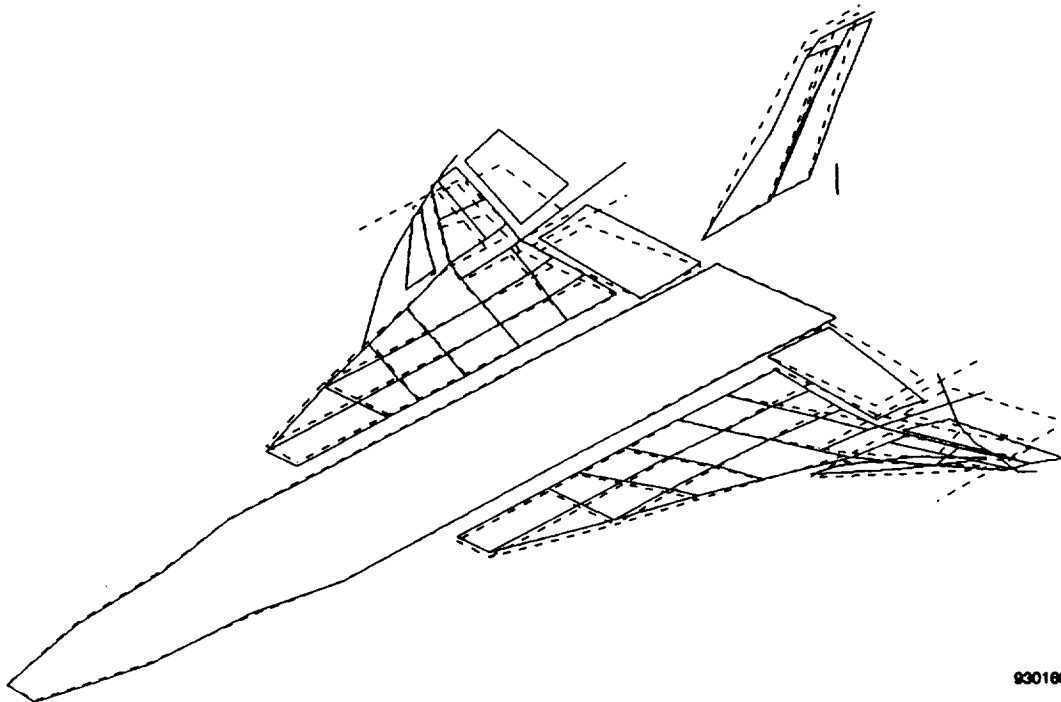

930186


(b) Modified, 13.23 Hz.

Figure 19. Aircraft mode shapes, antisymmetric launcher rail bending.

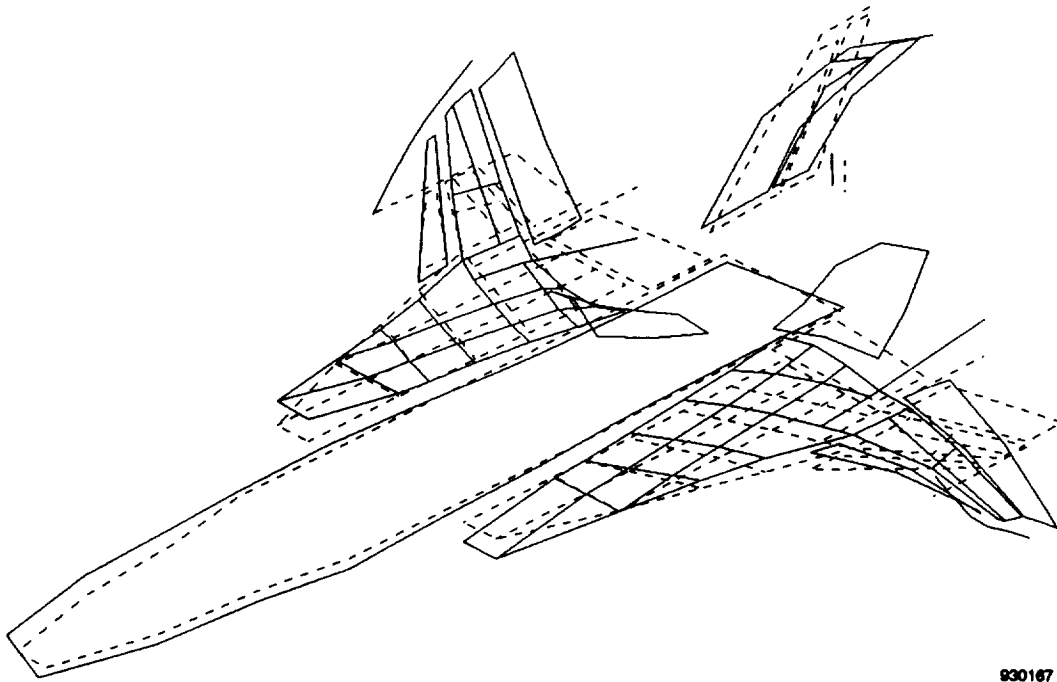

930167


(a) Baseline, 20.36 Hz.

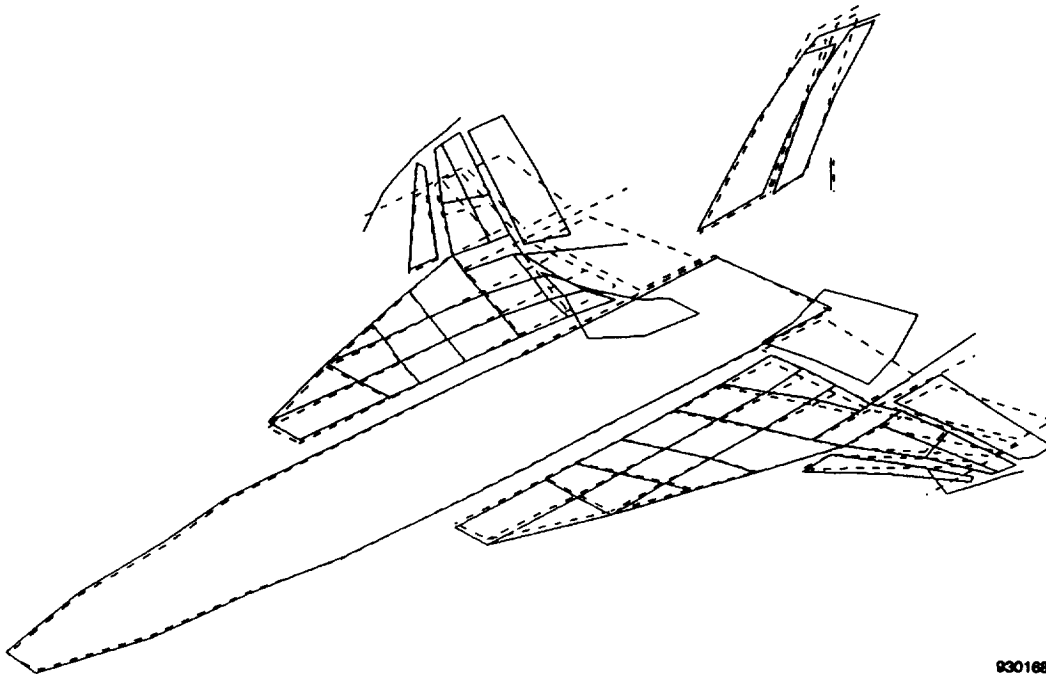


930168

(b) Modified, 20.57 Hz.

Figure 20. Aircraft mode shapes, antisymmetric control surface mode 1.

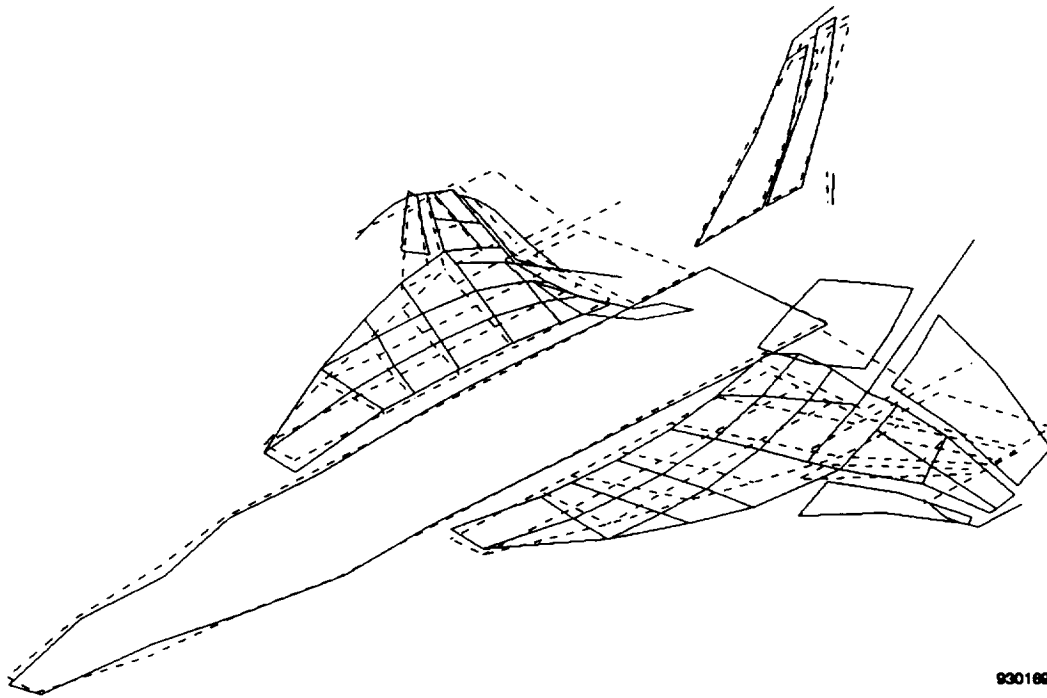


(a) Baseline, 22.19 Hz.

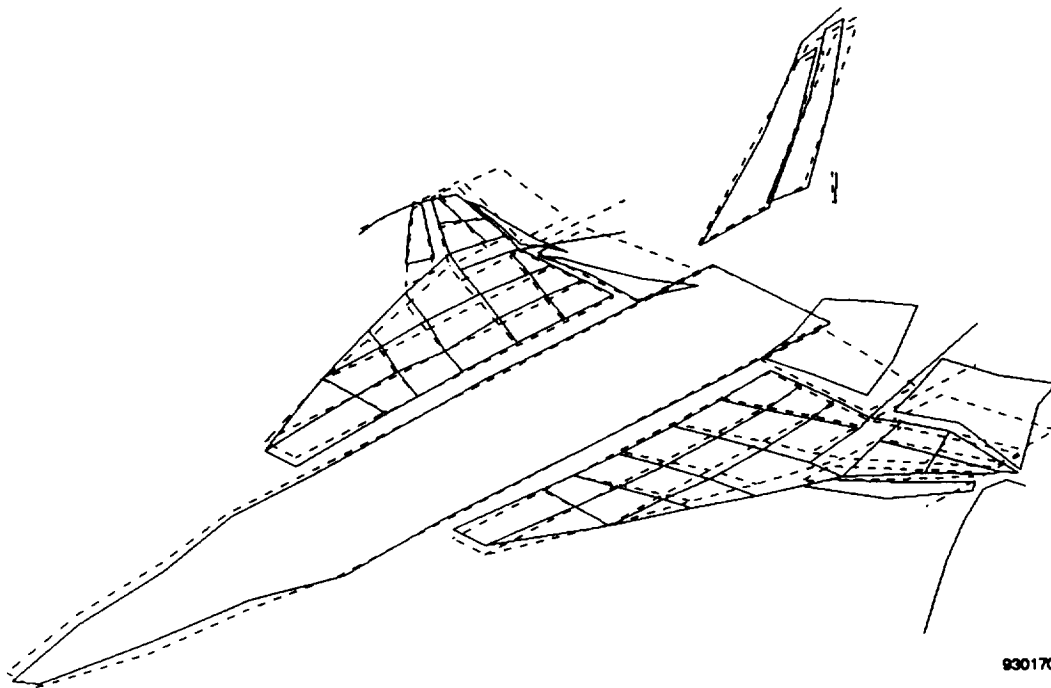


(b) Modified, 23.99 Hz.

Figure 21. Aircraft mode shapes, antisymmetric control surface mode 2.

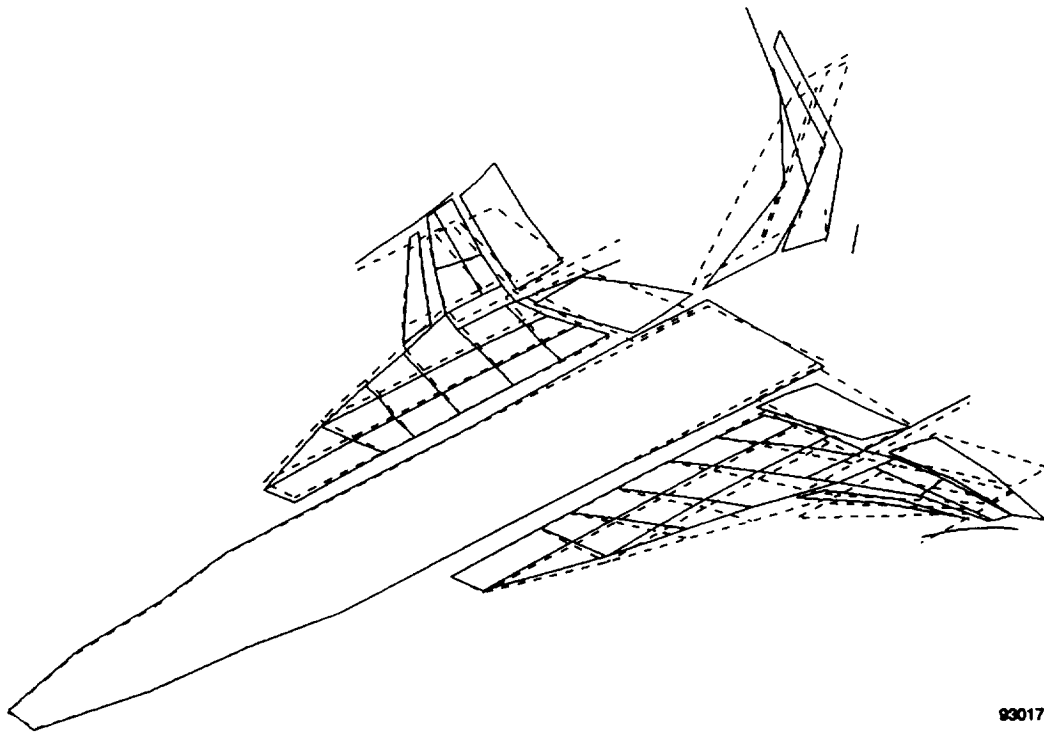

930171


(a) Baseline, 27.05 Hz.

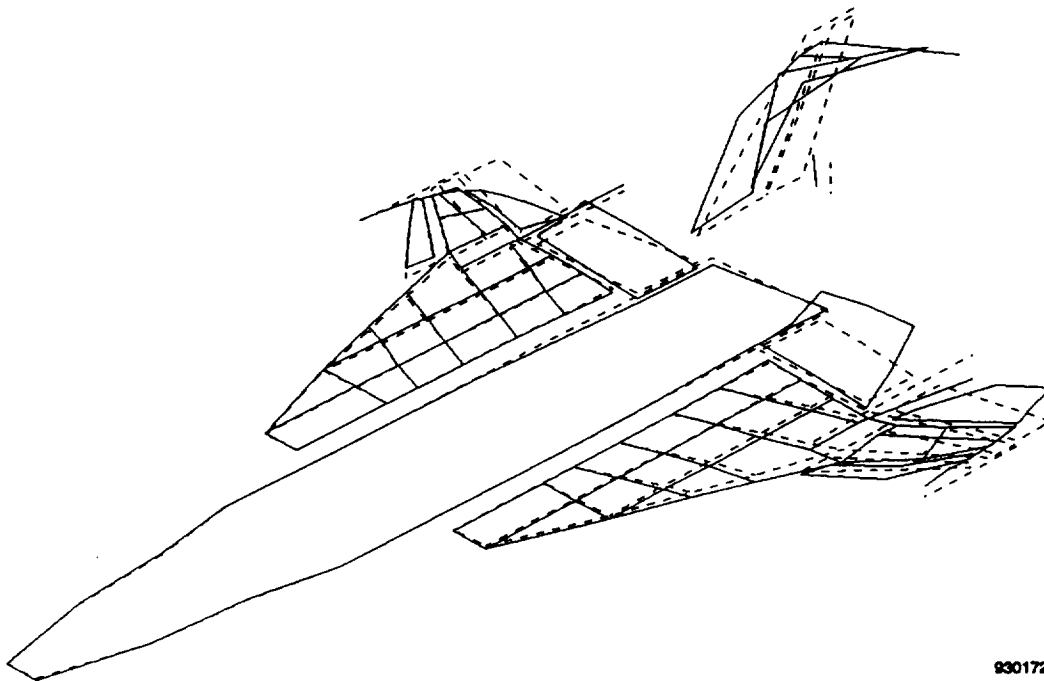

930172


(b) Modified, 27.81 Hz.

Figure 22. Aircraft mode shapes, antisymmetric control surface mode 3.

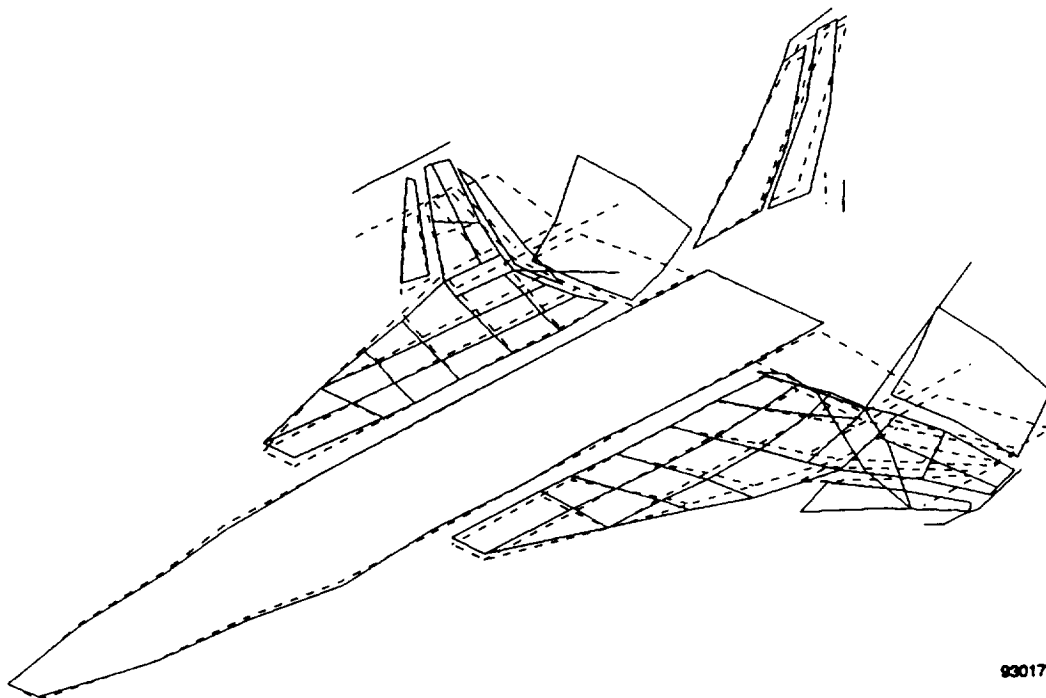

(a) Baseline, 28.78 Hz.


930173

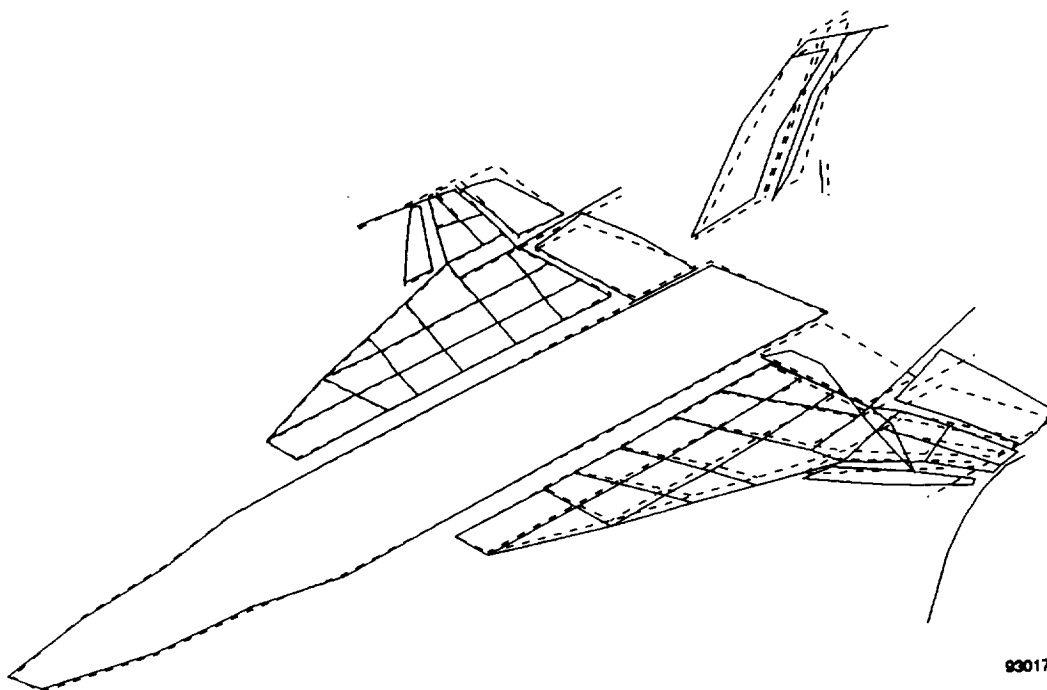

(b) Modified, 28.65 Hz.


930174

Figure 23. Aircraft mode shapes, antisymmetric control surface mode 4.

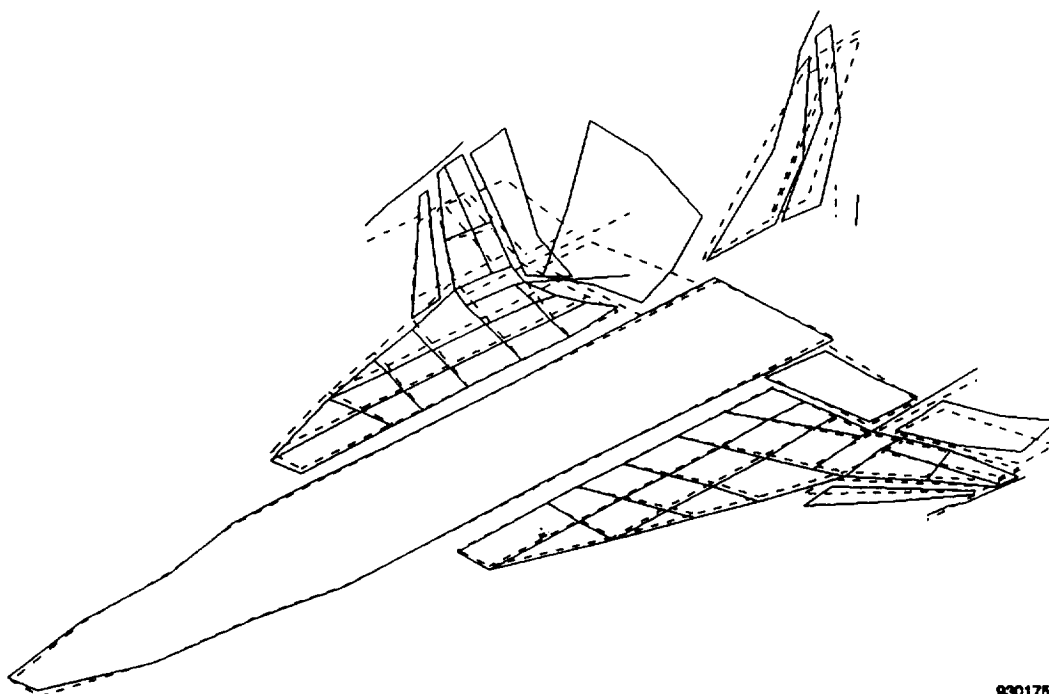

930175


(a) Baseline, 27.17 Hz.

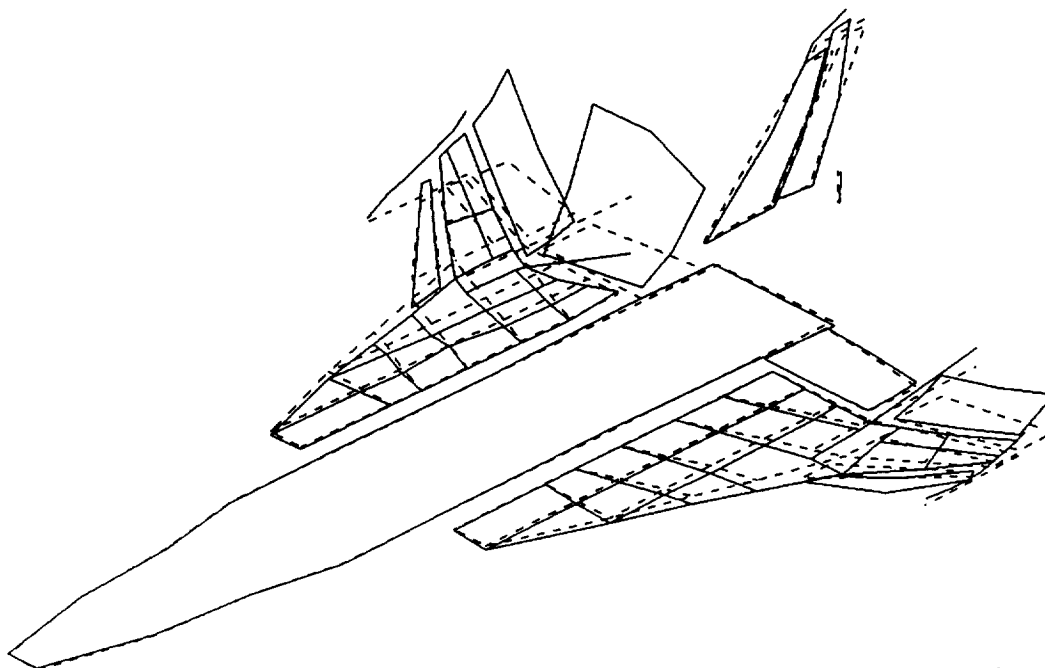

930176


(b) Modified, 26.62 Hz.

Figure 24. Aircraft mode shapes, asymmetric control surface mode 1.

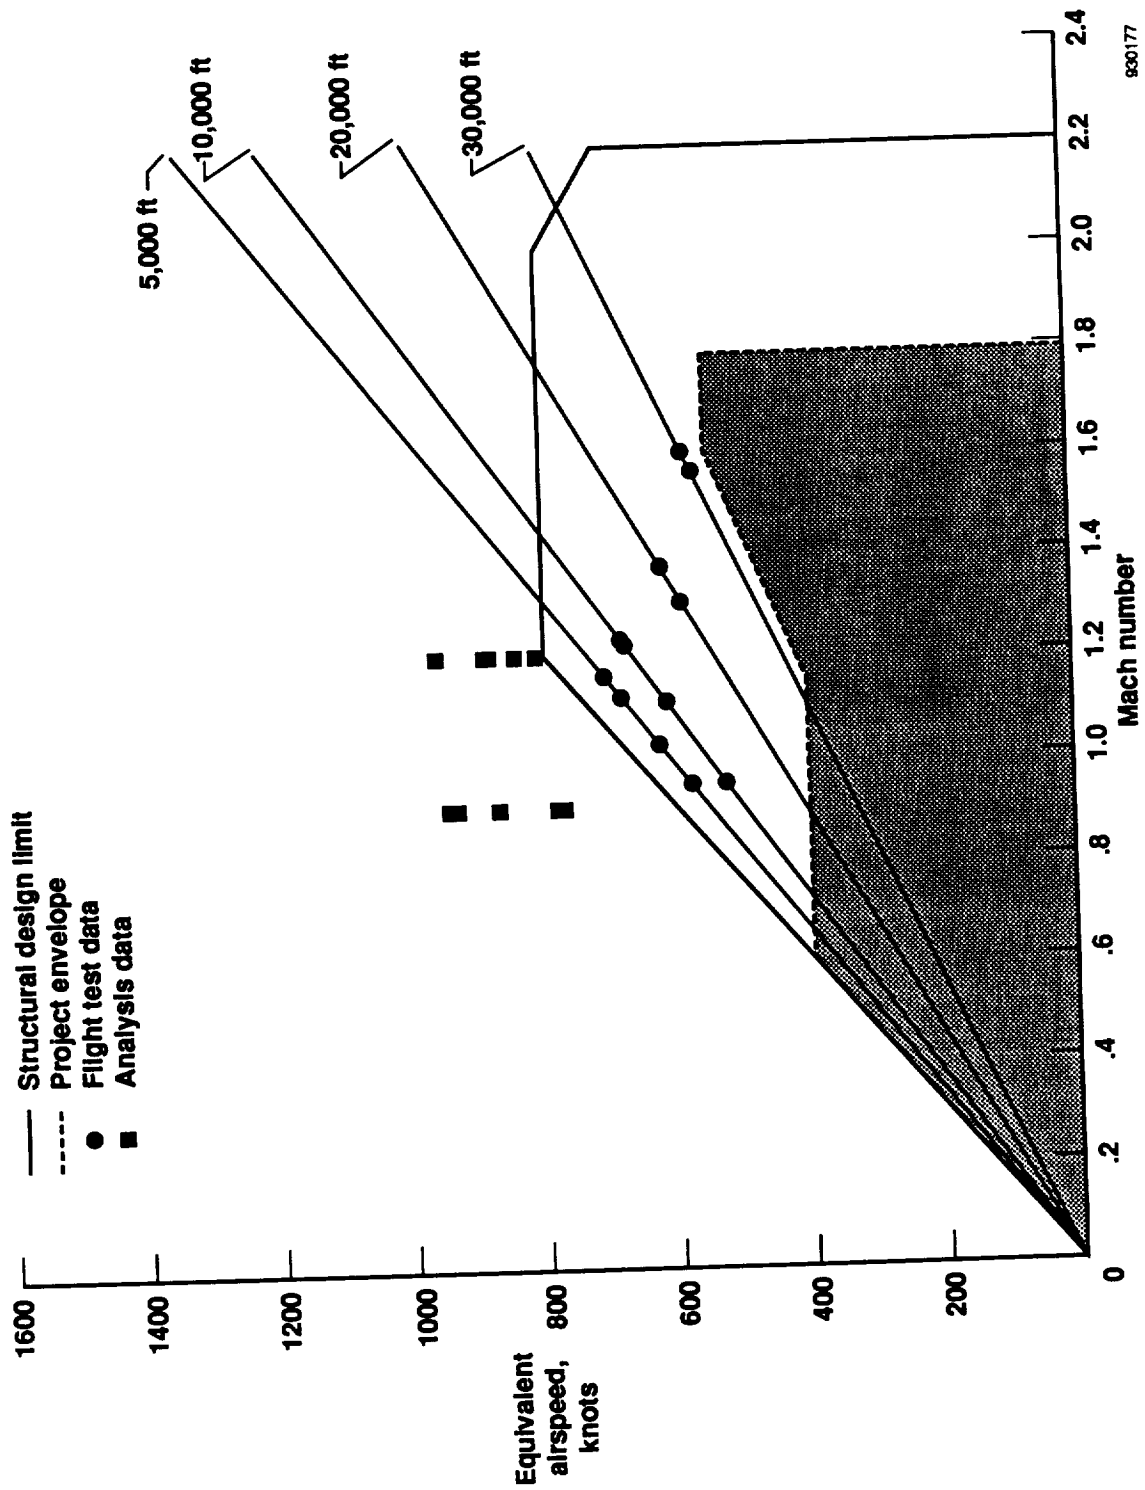


930177

Figure 25. Summary of manufacturer's F-16XL flight and analysis test data.

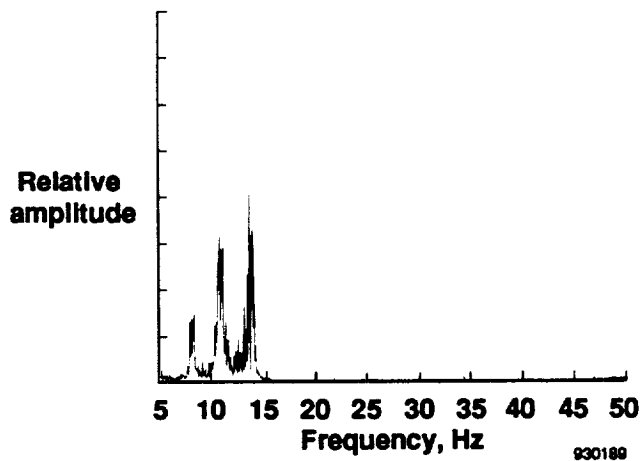


(a) 25,000 ft.

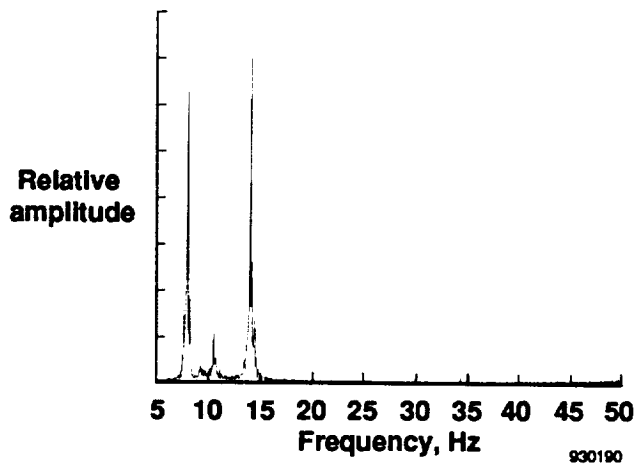


(b) 38,000 ft.

Figure 26 Left-wing forward accelerometer spectrum.

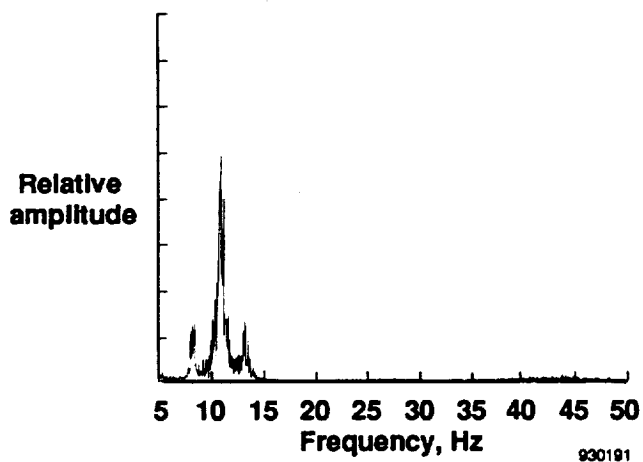


(a) 25,000 ft.

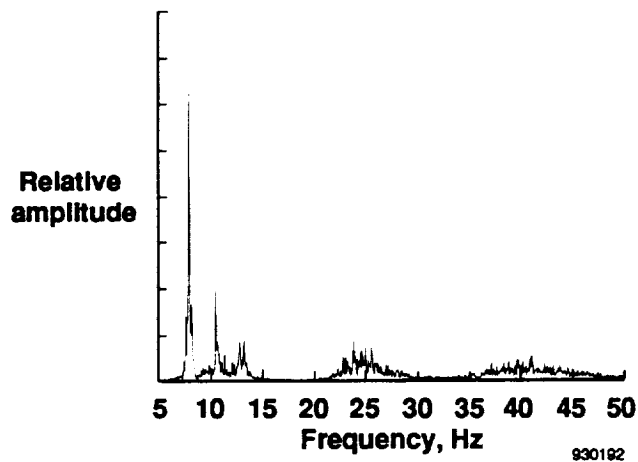


(b) 38,000 ft.

Figure 27. Right-wing forward accelerometer spectrum.

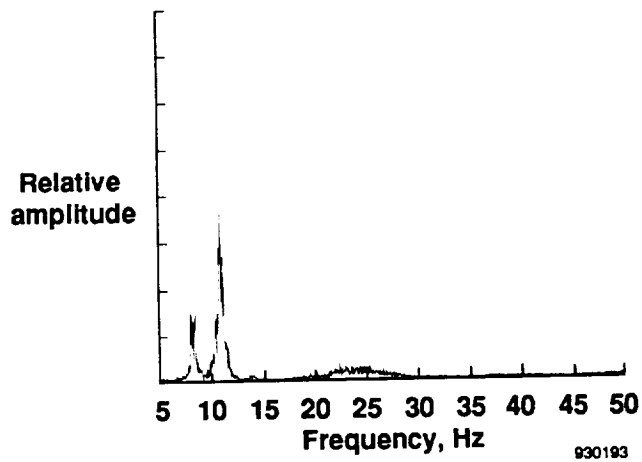


(a) 25,000 ft.

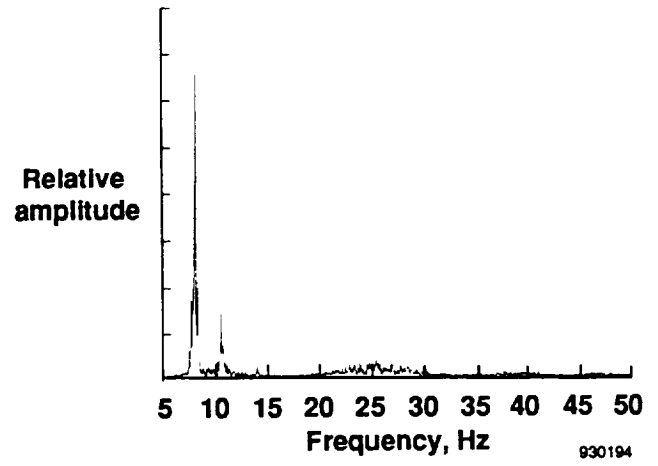


(b) 38,000 ft.

Figure 28. Left-wing aft accelerometer spectrum.

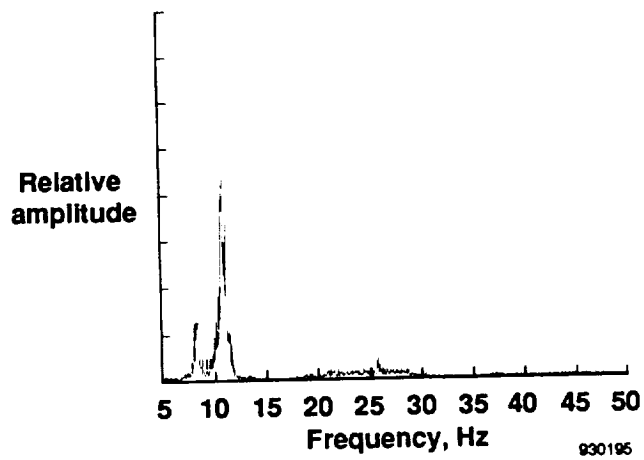


(a) 25,000 ft.

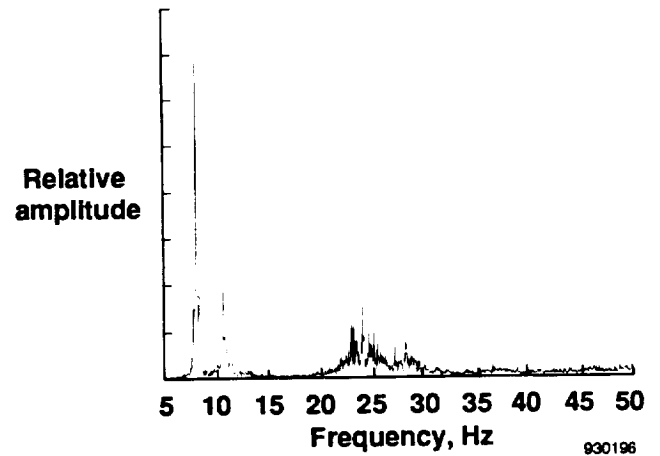


(b) 38,000 ft.

Figure 29. Right-wing aft accelerometer spectrum.

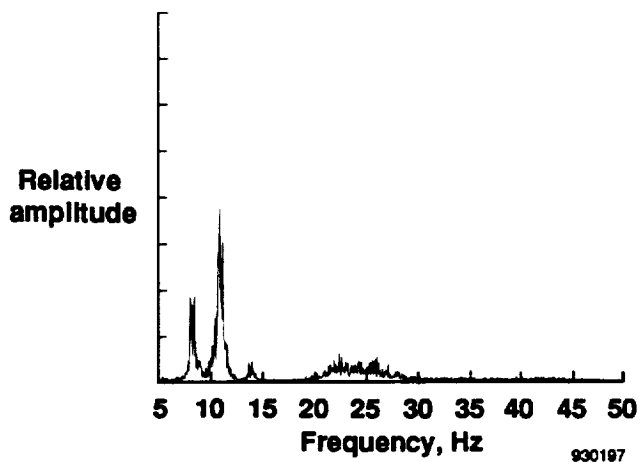


(a) 25,000 ft.

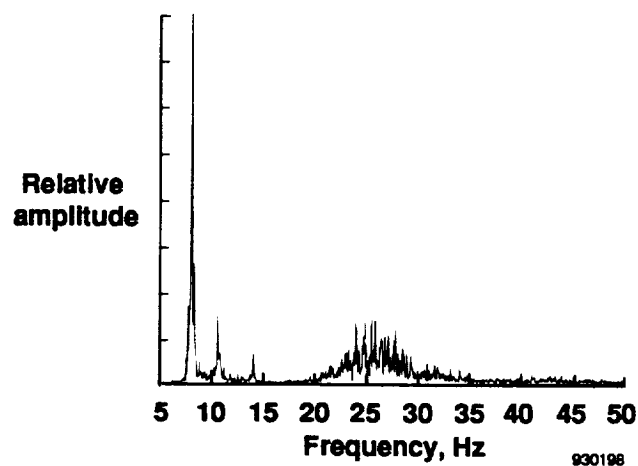


(b) 38,000 ft.

Figure 30. Left-aileron beam accelerometer spectrum.

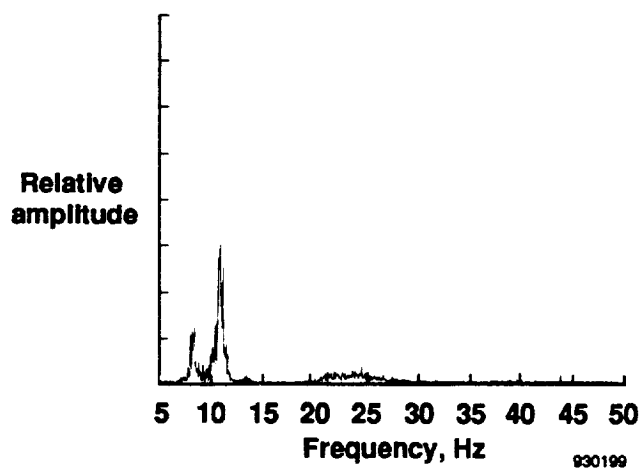


(a) 25,000 ft.

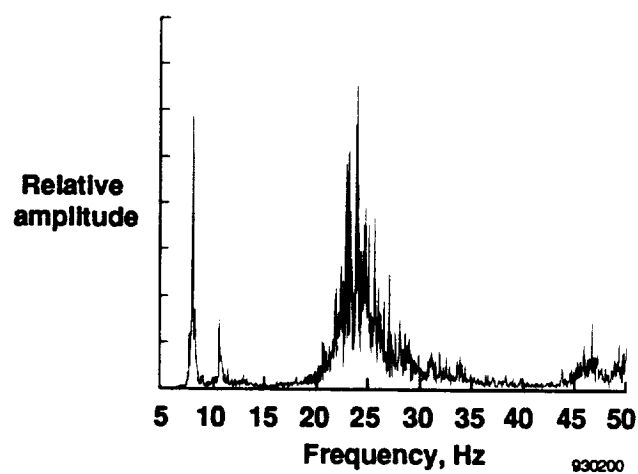


(b) 38,000 ft.

Figure 31. Right-aileron beam accelerometer spectrum.

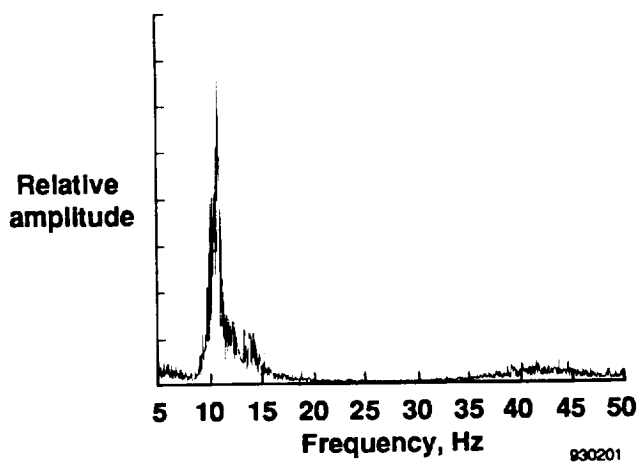


(a) 25,000 ft.

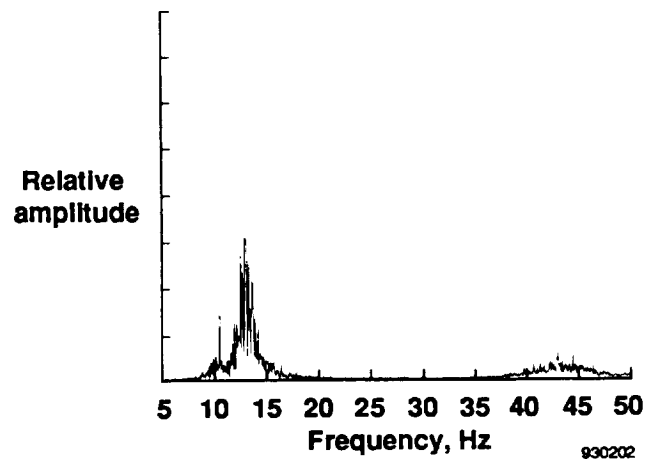


(b) 38,000 ft.

Figure 32. Vertical-tail tip accelerometer spectrum.

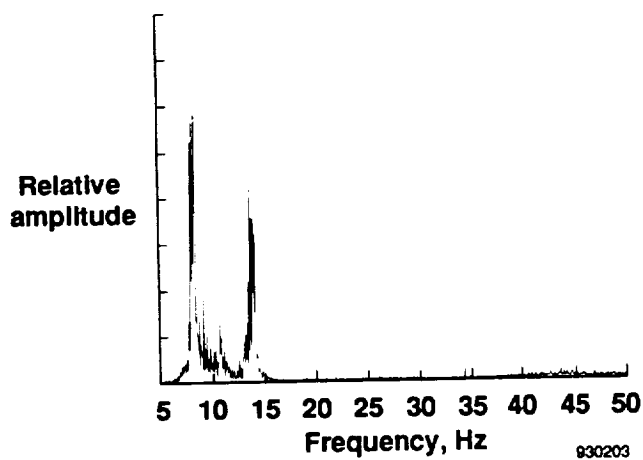


(a) 25,000 ft.

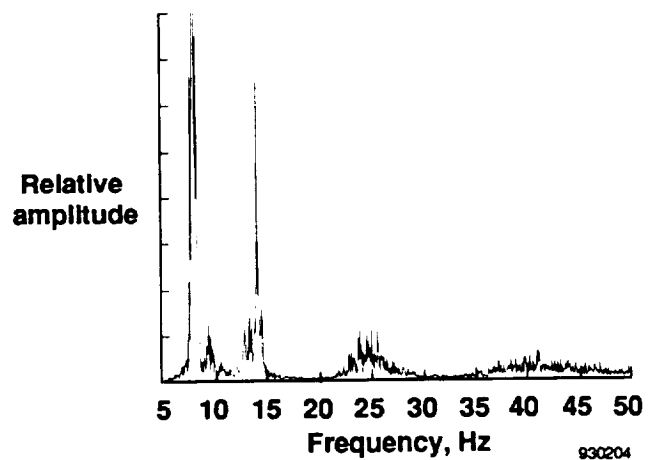


(b) 38,000 ft.

Figure 33. Accelerometer spectrum for left- plus right-wing forward.

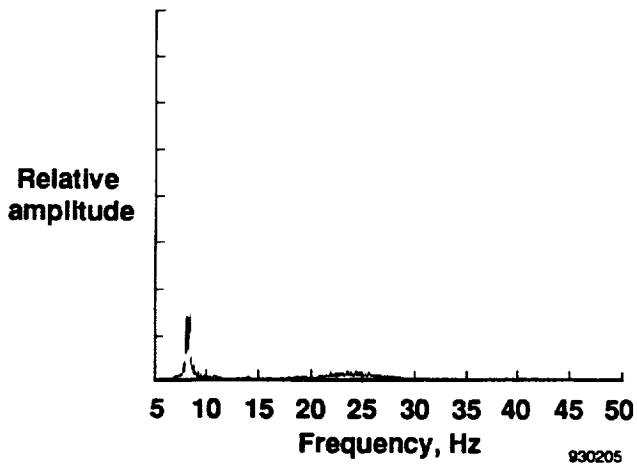


(a) 25,000 ft.

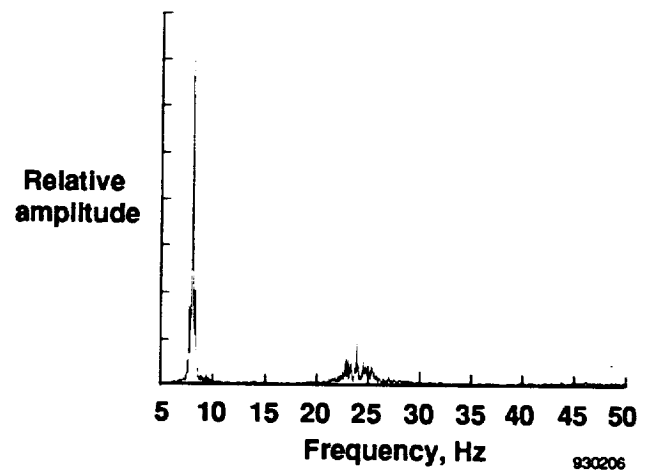


(b) 38,000 ft.

Figure 34. Accelerometer spectrum for left- plus right-wing aft.

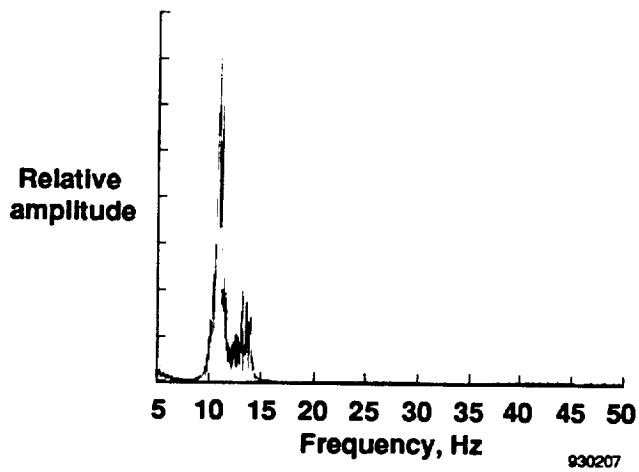


(a) 25,000 ft.

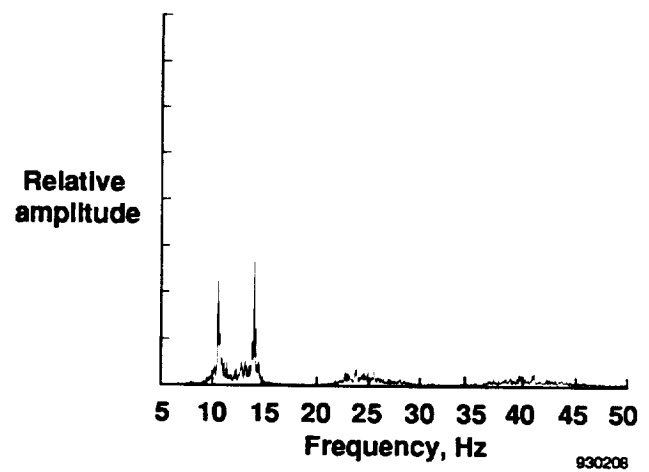


(b) 38,000 ft.

Figure 35. Accelerometer spectrum for left- minus right-wing forward.

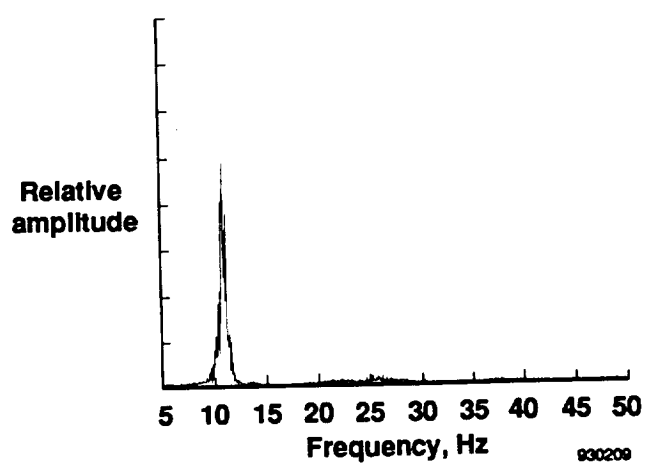


(a) 25,000 ft.

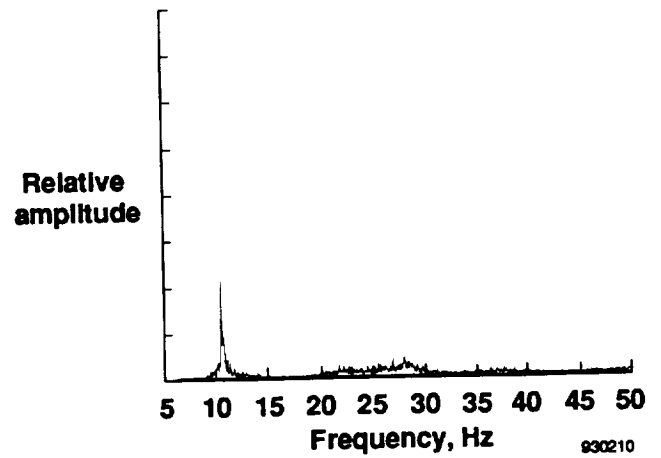


(b) 38,000 ft.

Figure 36. Accelerometer spectrum for left- minus right-wing aft.

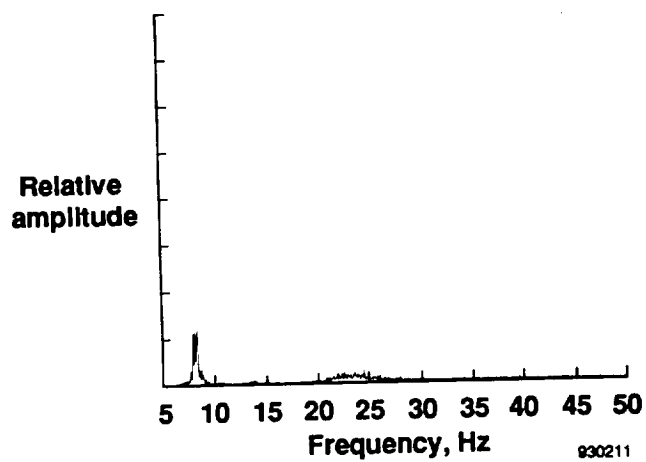


(a) 25,000 ft.

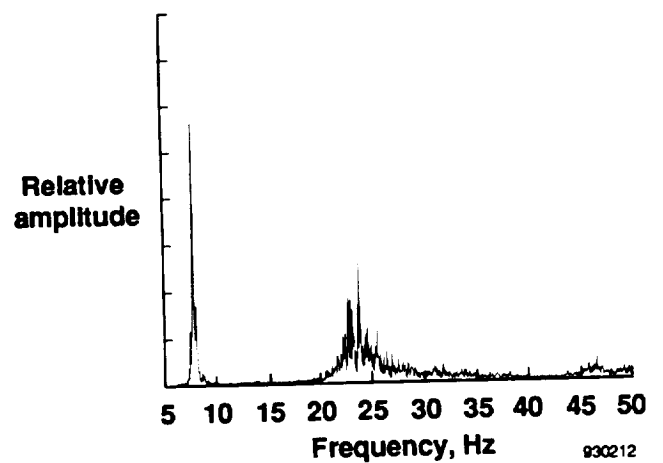


(b) 38,000 ft.

Figure 37. Accelerometer spectrum for left- plus right-aileron beam.

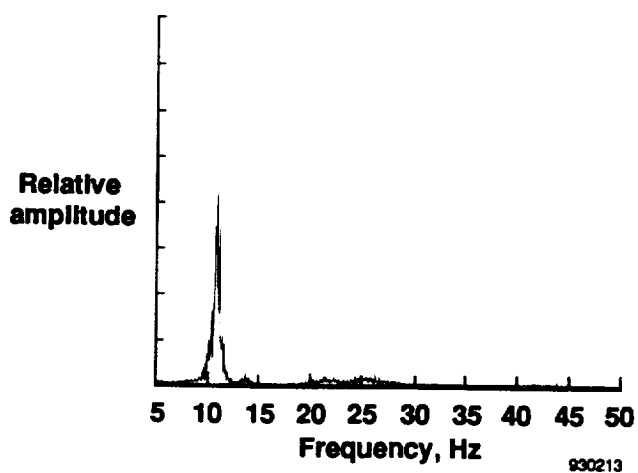

(a) 25,000 ft.

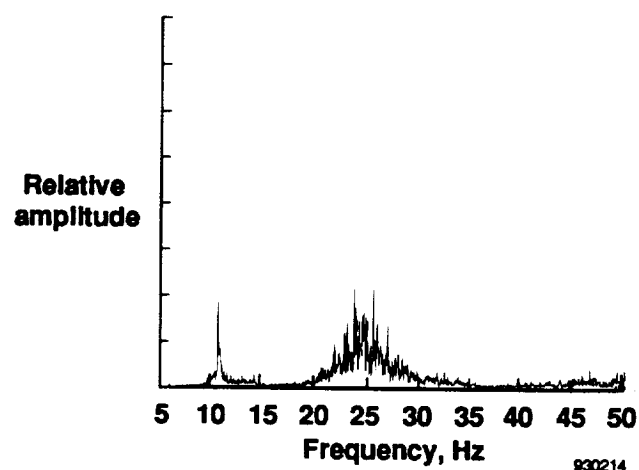

(b) 38,000 ft.

Figure 38. Accelerometer spectrum for left- plus right-aileron beam.

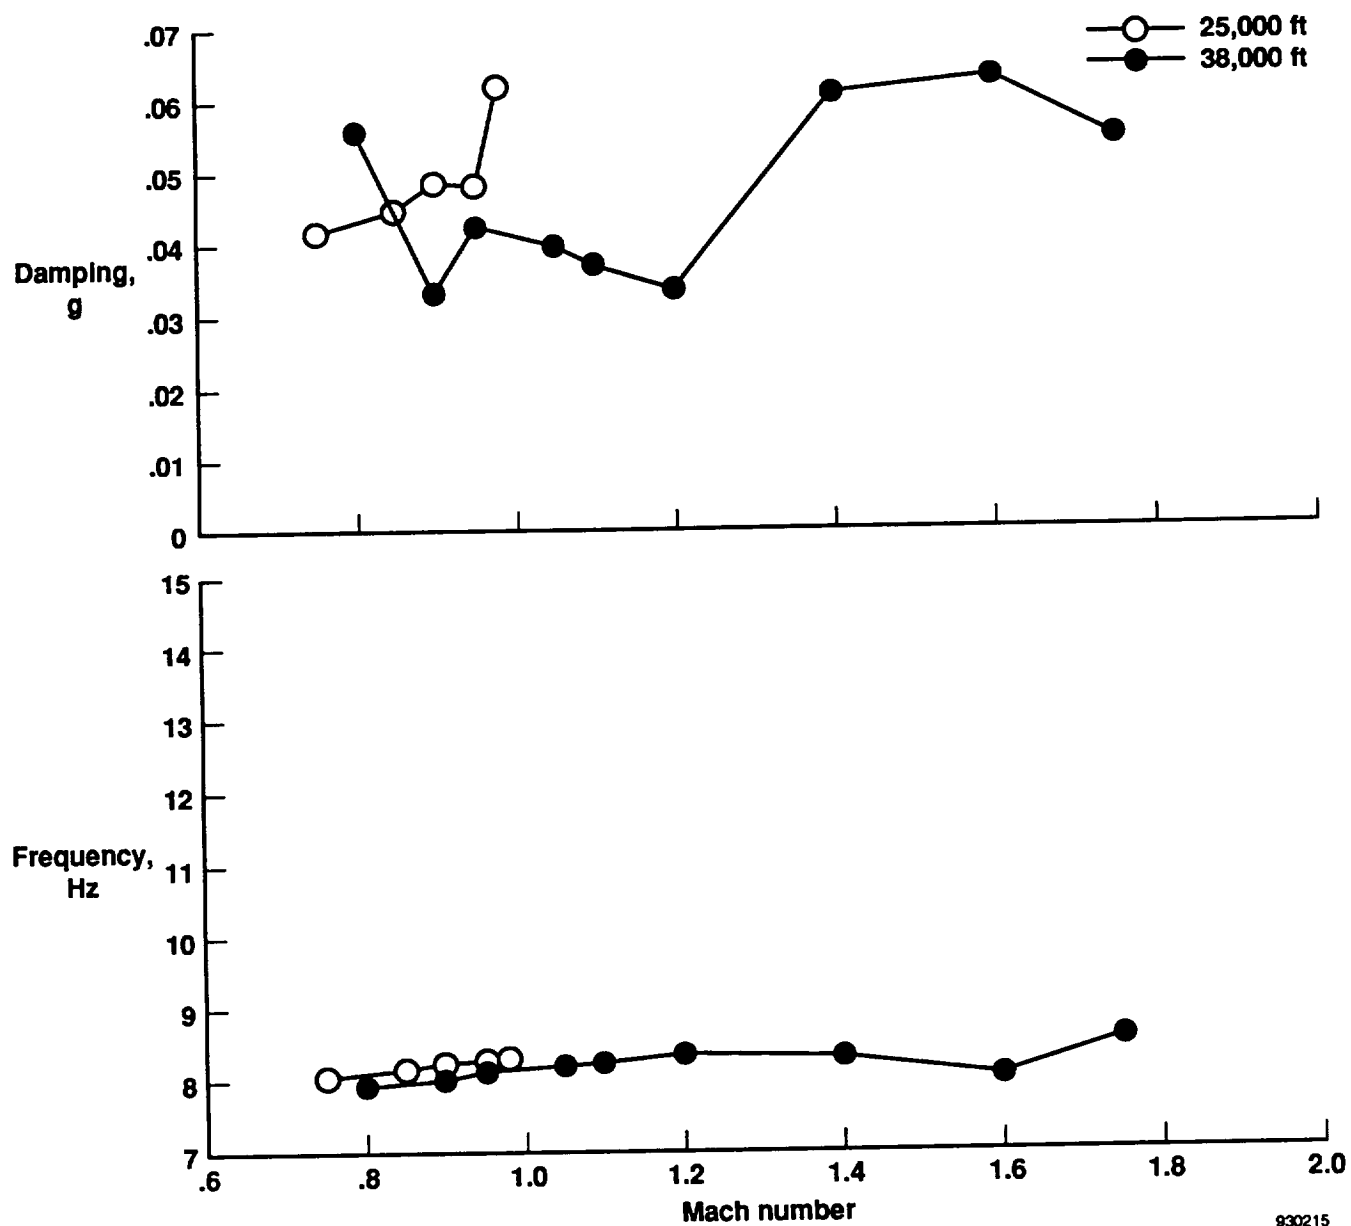


Figure 39. Symmetric wing bending flight test data.

930215

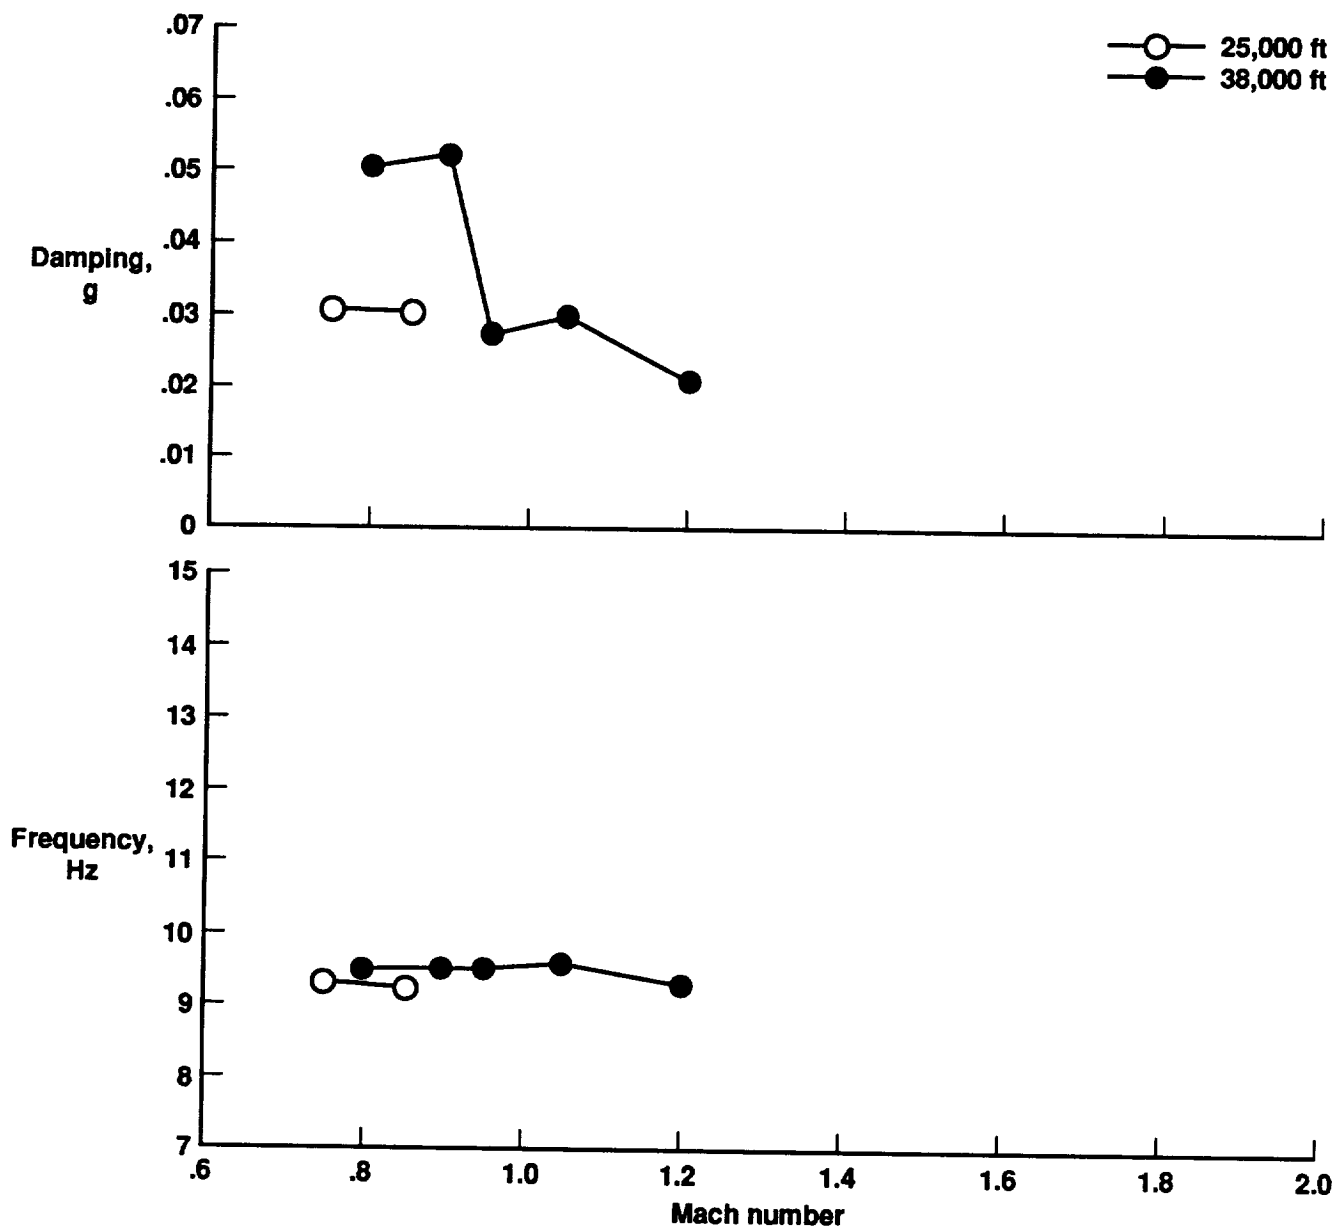


Figure 40. Fuselage bending flight test data.

930216

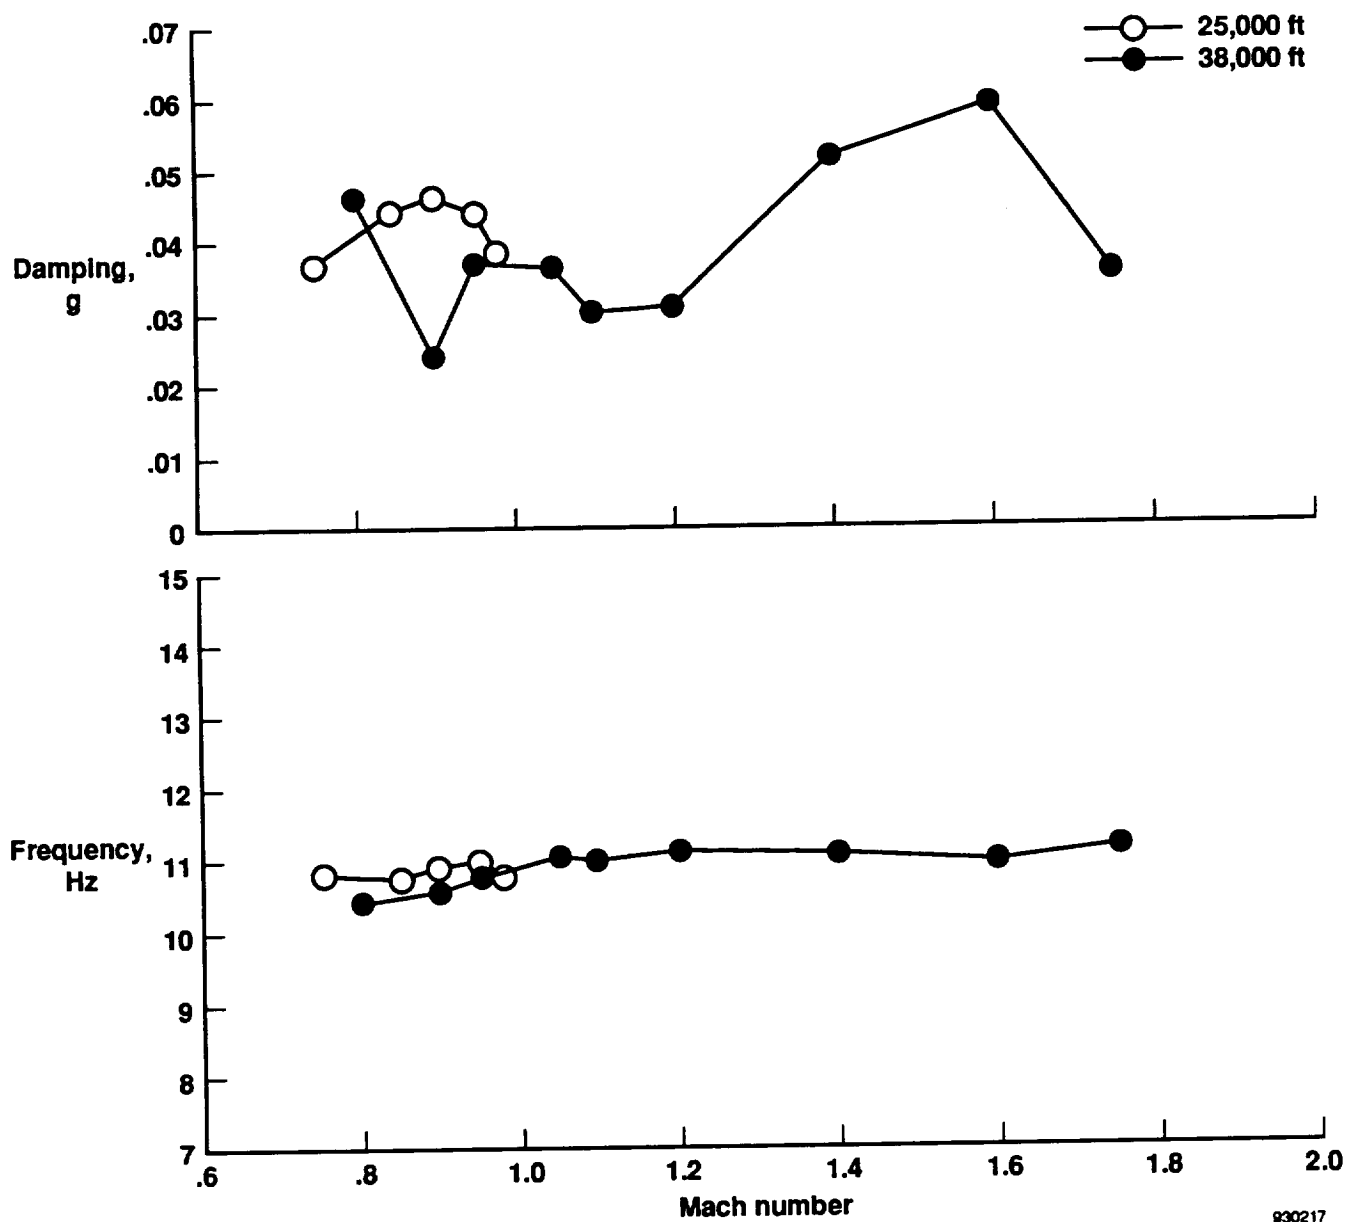


Figure 41. Antisymmetric wing bending flight test data.

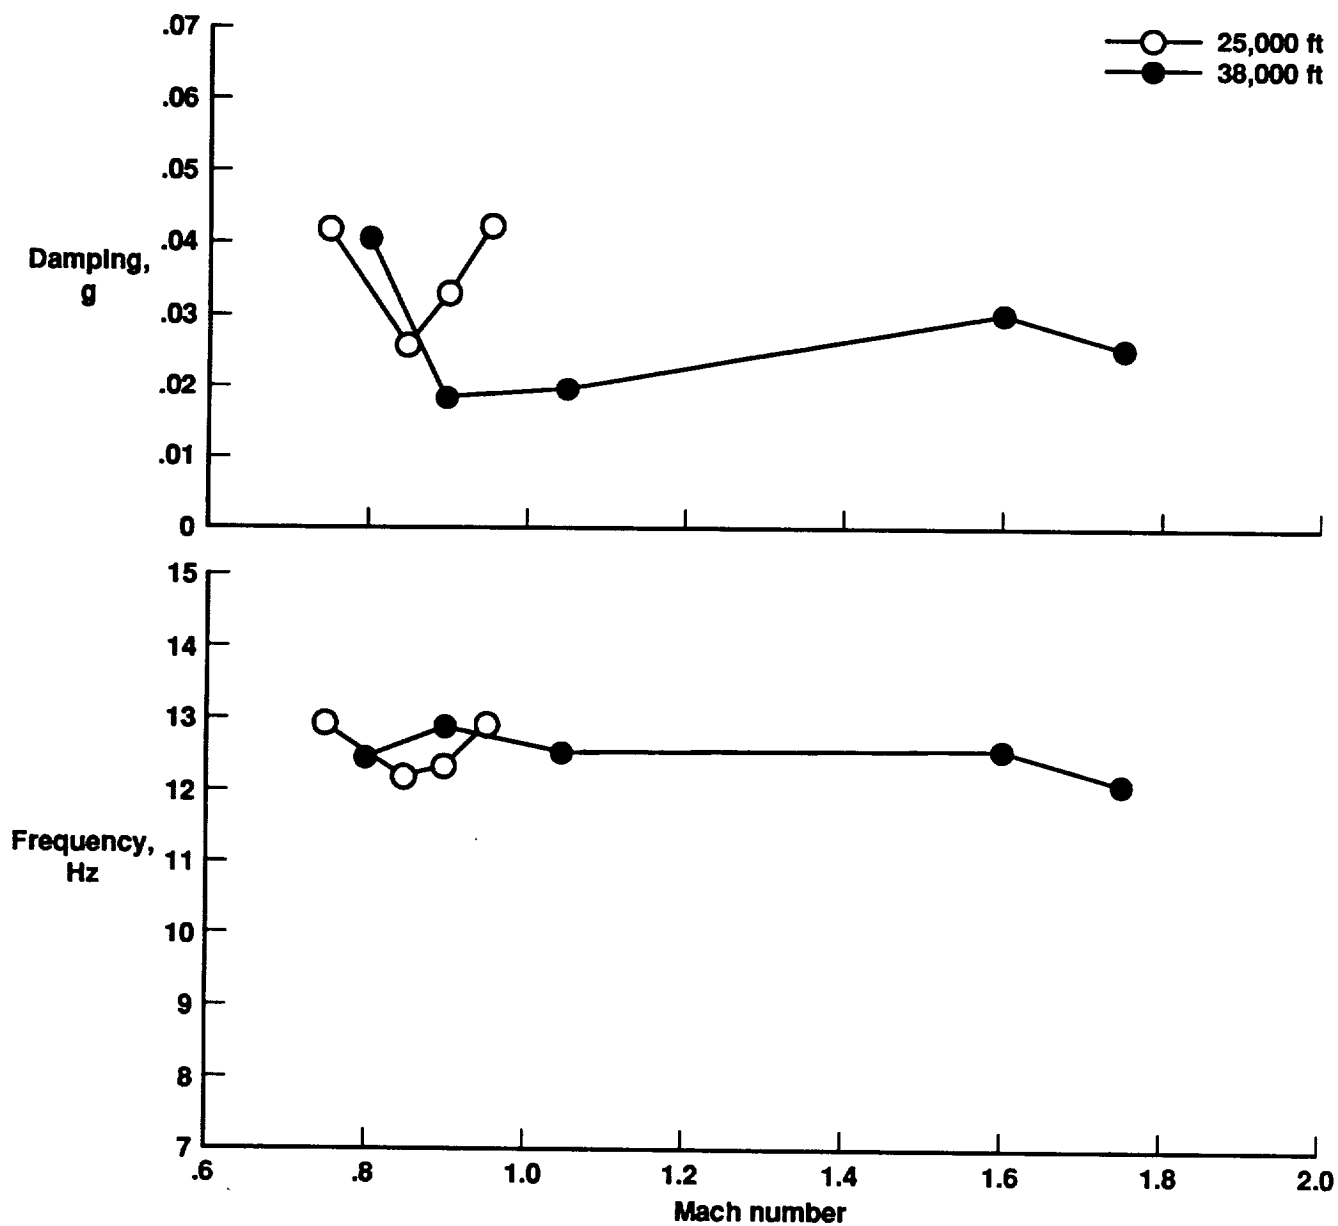


Figure 42. Vertical-tail bending flight test data.

930218

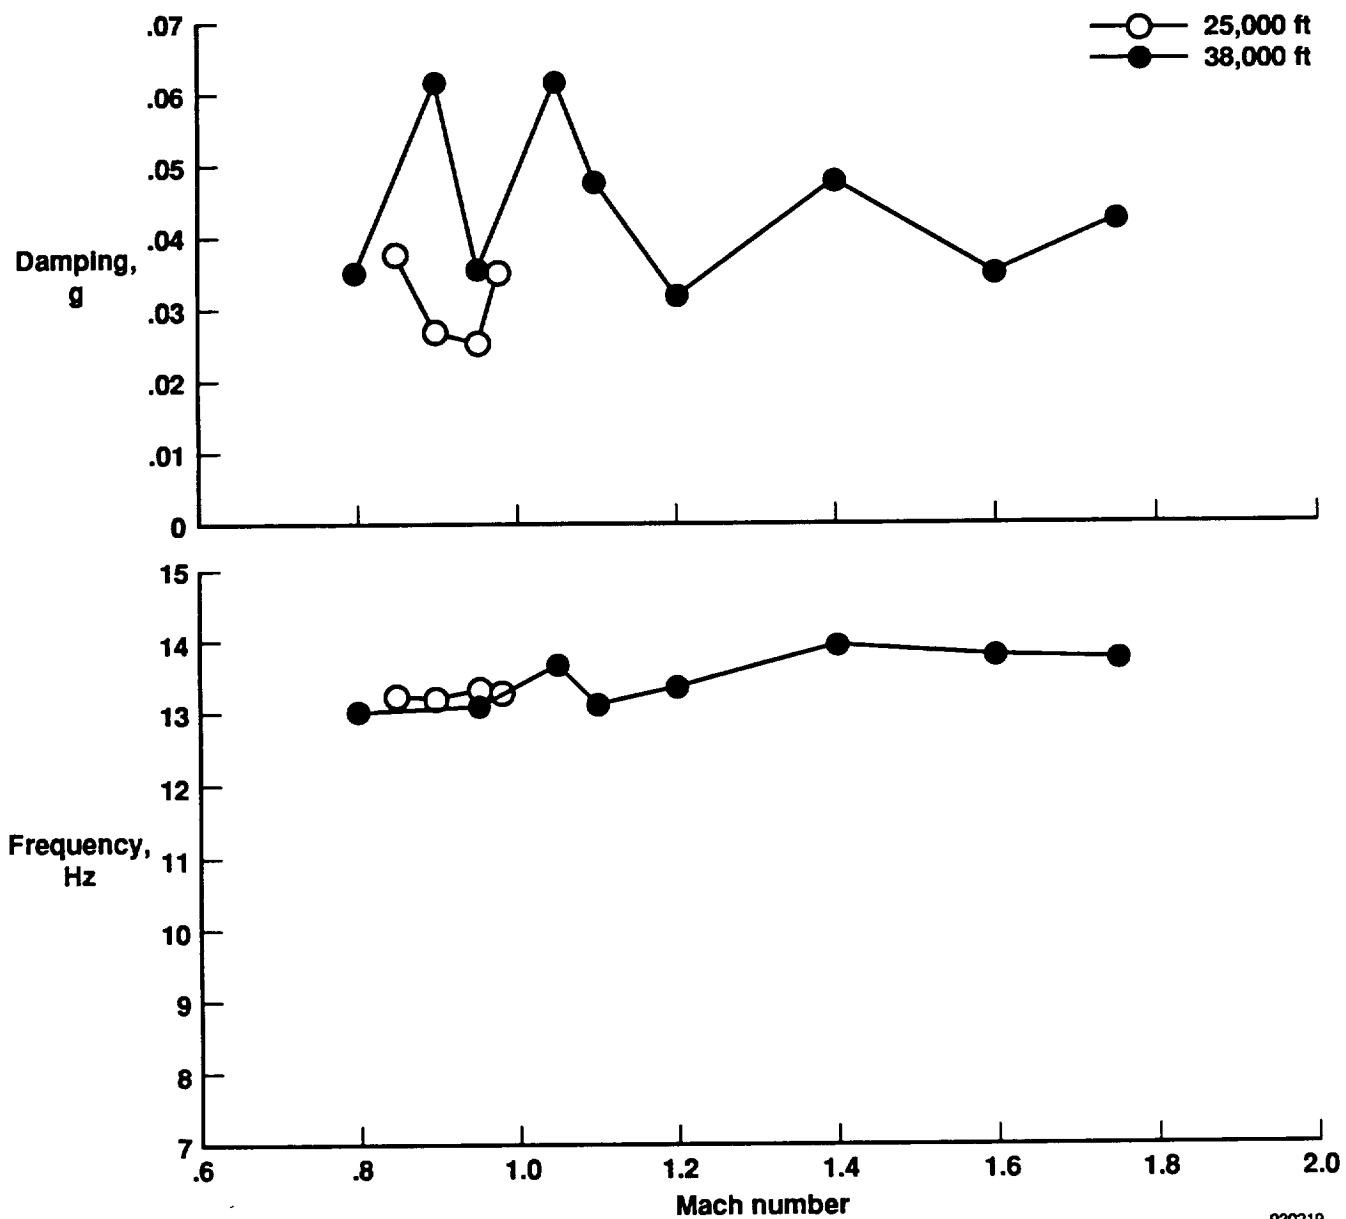


Figure 43. Antisymmetric launcher bending flight test data.

930219

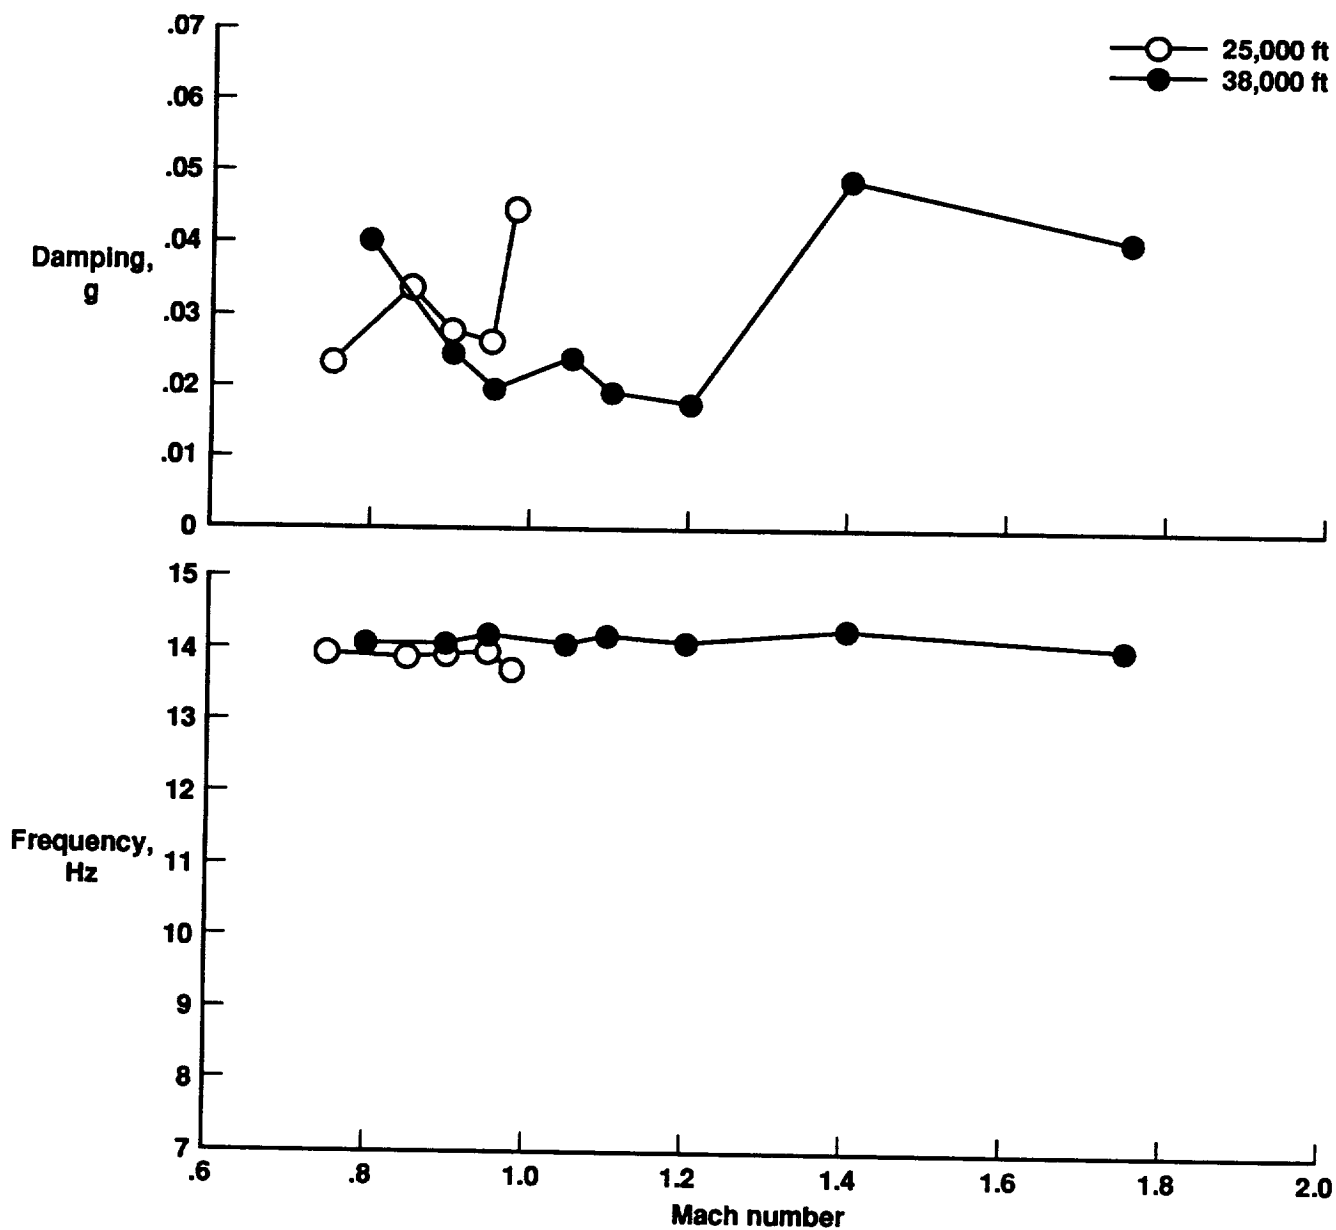


Figure 44. Symmetric launcher bending flight test data.

930220

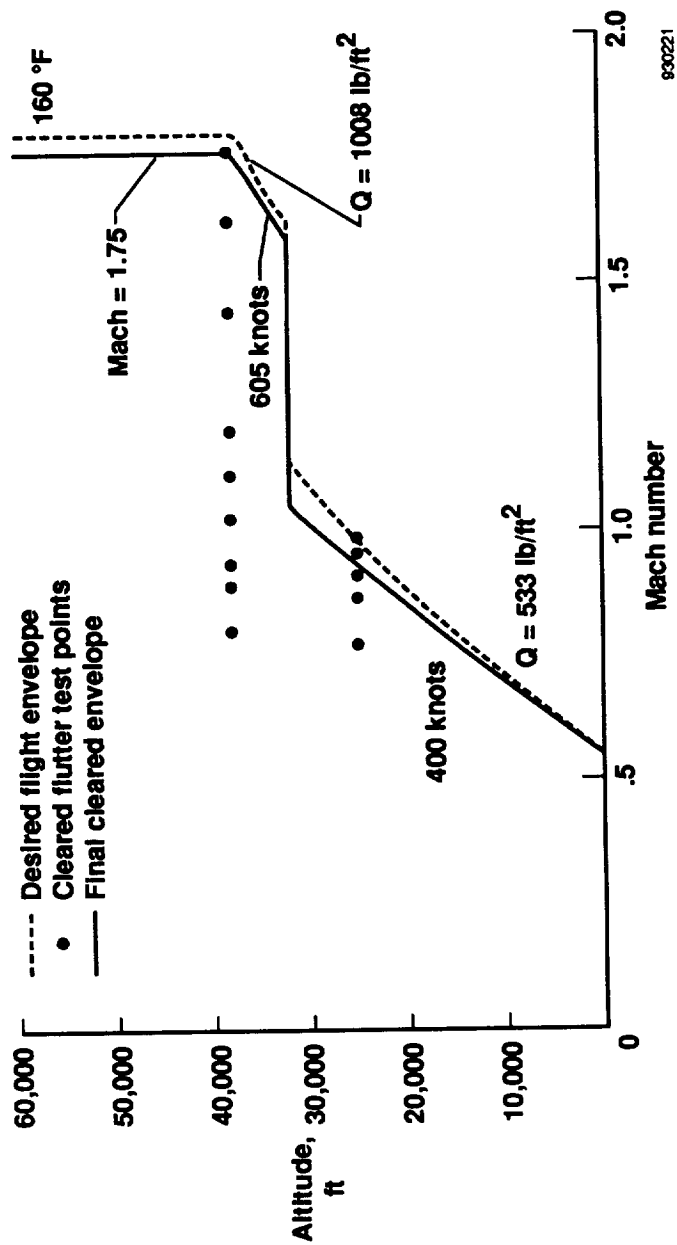


Figure 45. Final cleared flutter envelope.

APPENDIX

Table A-1. F-16XL accelerometer locations for GVT.

| Point number | Fuselage station | Span location | Waterline |
|--------------|------------------|---------------|-----------|
| 101 | 475 | -194 | 91 |
| 102 | 480 | -194 | 91 |
| 103 | 493 | -194 | 91 |
| 104 | 461 | -193 | 91 |
| 105 | 497 | -192 | 91 |
| 106 | 509 | -192 | 91 |
| 107 | 522 | -192 | 91 |
| 108 | 465 | -191 | 91 |
| 109 | 454 | -168 | 91 |
| 110 | 430 | -165 | 91 |
| 111 | 442 | -164 | 91 |
| 112 | 486 | -161 | 91 |
| 113 | 515 | -161 | 91 |
| 114 | 480 | -160 | 91 |
| 115 | 400 | -137 | 91 |
| 116 | 420 | -137 | 91 |
| 117 | 430 | -136 | 91 |
| 118 | 456 | -136 | 91 |
| 119 | 471 | -136 | 91 |
| 120 | 491 | -129 | 91 |
| 121 | 508 | -129 | 91 |
| 122 | 474 | -129 | 91 |
| 123 | 386 | -123 | 91 |

Table A-1. Continued.

| Point number | Fuselage station | Span location | Waterline |
|--------------|------------------|---------------|-----------|
| 124 | 423 | -121 | 91 |
| 125 | 458 | -121 | 91 |
| 126 | 465 | -121 | 91 |
| 127 | 542 | -121 | 91 |
| 128 | 471 | -114 | 91 |
| 129 | 489 | -114 | 91 |
| 130 | 506 | -114 | 91 |
| 131 | 349 | -112 | 91 |
| 132 | 305 | -99 | 91 |
| 133 | 344 | -98 | 91 |
| 134 | 376 | -98 | 91 |
| 135 | 414 | -98 | 91 |
| 136 | 449 | -98 | 91 |
| 137 | 465 | -98 | 91 |
| 138 | 471 | -78 | 91 |
| 139 | 511 | -78 | 91 |
| 140 | 243 | -76 | 91 |
| 141 | 305 | -76 | 91 |
| 142 | 335 | -76 | 91 |
| 143 | 367 | -76 | 91 |
| 144 | 405 | -76 | 91 |
| 145 | 439 | -76 | 91 |
| 146 | 465 | -76 | 91 |
| 147 | 243 | -54 | 91 |
| 148 | 305 | -54 | 91 |
| 149 | 326 | -54 | 91 |
| 150 | 359 | -54 | 91 |
| 151 | 396 | -54 | 91 |

Table A-1. Continued.

| Point number | Fuselage station | Span location | Waterline |
|--------------|------------------|---------------|-----------|
| 152 | 430 | -54 | 91 |
| 153 | 465 | -54 | 91 |
| 154 | 471 | -43 | 91 |
| 155 | 493 | -43 | 91 |
| 156 | 515 | -43 | 91 |
| 157 | 425 | -196 | 91 |
| 158 | 440 | -196 | 91 |
| 159 | 452 | -196 | 91 |
| 160 | 465 | -196 | 91 |
| 161 | 482 | -196 | 91 |
| 162 | 496 | -196 | 91 |
| 201 | 475 | 194 | 91 |
| 202 | 480 | 194 | 91 |
| 203 | 493 | 194 | 91 |
| 204 | 461 | 193 | 91 |
| 205 | 497 | 192 | 91 |
| 206 | 509 | 192 | 91 |
| 207 | 522 | 192 | 91 |
| 208 | 465 | 191 | 91 |
| 209 | 454 | 168 | 91 |
| 210 | 430 | 165 | 91 |
| 211 | 442 | 164 | 91 |
| 212 | 486 | 161 | 91 |
| 213 | 515 | 161 | 91 |
| 214 | 480 | 160 | 91 |
| 215 | 400 | 137 | 91 |
| 216 | 420 | 137 | 91 |
| 217 | 430 | 136 | 91 |

Table A-1. Continued.

| Point number | Fuselage station | Span location | Waterline |
|--------------|------------------|---------------|-----------|
| 218 | 456 | 136 | 91 |
| 219 | 471 | 136 | 91 |
| 220 | 491 | 129 | 91 |
| 221 | 508 | 129 | 91 |
| 222 | 474 | 129 | 91 |
| 223 | 386 | 123 | 91 |
| 224 | 423 | 121 | 91 |
| 225 | 458 | 121 | 91 |
| 226 | 565 | 121 | 91 |
| 227 | 542 | 121 | 91 |
| 228 | 471 | 114 | 91 |
| 229 | 489 | 114 | 91 |
| 230 | 506 | 114 | 91 |
| 231 | 349 | 112 | 91 |
| 232 | 305 | 99 | 91 |
| 233 | 344 | 98 | 91 |
| 234 | 376 | 98 | 91 |
| 235 | 414 | 98 | 91 |
| 236 | 449 | 98 | 91 |
| 237 | 465 | 98 | 91 |
| 238 | 471 | 78 | 91 |
| 239 | 511 | 78 | 91 |
| 240 | 243 | 76 | 91 |
| 241 | 305 | 76 | 91 |
| 242 | 334 | 76 | 91 |
| 243 | 367 | 76 | 91 |
| 244 | 405 | 76 | 91 |
| 245 | 439 | 76 | 91 |

Table A-1. Continued.


| Point number | Fuselage station | Span location | Waterline |
|--------------|------------------|---------------|-----------|
| 246 | 465 | 76 | 91 |
| 247 | 243 | 54 | 91 |
| 248 | 305 | 54 | 91 |
| 249 | 326 | 54 | 91 |
| 250 | 358 | 54 | 91 |
| 251 | 396 | 54 | 91 |
| 252 | 430 | 54 | 91 |
| 253 | 465 | 54 | 91 |
| 254 | 471 | 43 | 91 |
| 255 | 493 | 43 | 91 |
| 256 | 515 | 43 | 91 |
| 257 | 425 | 196 | 91 |
| 258 | 440 | 196 | 91 |
| 259 | 452 | 196 | 91 |
| 260 | 465 | 196 | 91 |
| 261 | 482 | 196 | 91 |
| 262 | 496 | 196 | 91 |
| 301 | 548 | 0 | 225 |
| 302 | 584 | 0 | 227 |
| 303 | 540 | 0 | 217 |
| 304 | 560 | 0 | 217 |
| 305 | 568 | 0 | 223 |
| 306 | 583 | 0 | 223 |
| 307 | 513 | 0 | 188 |
| 308 | 536 | 0 | 174 |
| 309 | 551 | 0 | 194 |
| 310 | 565 | 0 | 185 |
| 311 | 470 | 0 | 141 |

Table A-1. Continued.

| Point number | Fuselage station | Span location | Waterline |
|--------------|------------------|---------------|-----------|
| 312 | 518 | 0 | 144 |
| 313 | 521 | 0 | 144 |
| 314 | 546 | 0 | 145 |
| 315 | 567 | 0 | 127 |
| 316 | 567 | 0 | 145 |
| 401 | 10 | -10 | 91 |
| 402 | 10 | -10 | 91 |
| 403 | 10 | 10 | 91 |
| 404 | 10 | 10 | 91 |
| 405 | 70 | -25 | 91 |
| 406 | 70 | -25 | 91 |
| 407 | 70 | 25 | 91 |
| 408 | 70 | 25 | 91 |
| 409 | 130 | -30 | 91 |
| 410 | 130 | -30 | 91 |
| 411 | 130 | 30 | 91 |
| 412 | 130 | 30 | 91 |
| 413 | 182 | -40 | 91 |
| 414 | 182 | -40 | 91 |
| 415 | 182 | 40 | 91 |
| 416 | 182 | 40 | 91 |
| 417 | 243 | -40 | 91 |
| 418 | 243 | -40 | 91 |
| 419 | 243 | 40 | 91 |
| 420 | 243 | 40 | 91 |
| 421 | 310 | -40 | 91 |
| 422 | 310 | -40 | 91 |
| 423 | 310 | 40 | 91 |

Table A-1. Concluded.

| Point number | Fuselage station | Span location | Waterline | |
|-----------------------------------|-----------------------------|------------------|---------------|-----------|
| 424 | 310 | 40 | 91 | |
| 425 | 385 | -40 | 91 | |
| 426 | 385 | -40 | 91 | |
| 427 | 385 | 40 | 91 | |
| 428 | 385 | 40 | 91 | |
| 429 | 465 | -40 | 91 | |
| 430 | 465 | -40 | 91 | |
| 431 | 465 | 40 | 91 | |
| 432 | 465 | 40 | 91 | |
| 433 | 524 | -40 | 91 | |
| 434 | 524 | -40 | 91 | |
| 435 | 524 | 40 | 91 | |
| 436 | 524 | 40 | 91 | |
| 437 | 558 | -40 | 91 | |
| 438 | 558 | -40 | 91 | |
| 439 | 558 | 40 | 91 | |
| 440 | 558 | 40 | 91 | |
| Shaker/force transducer locations | | | | |
| Shaker no. | Driving point accelerometer | Fuselage station | Span location | Waterline |
| 1 | 157 | 425 | -196 | 91 |
| 2 | 262 | 482 | 196 | 91 |
| 3 | 303 | 540 | 0 | 217 |

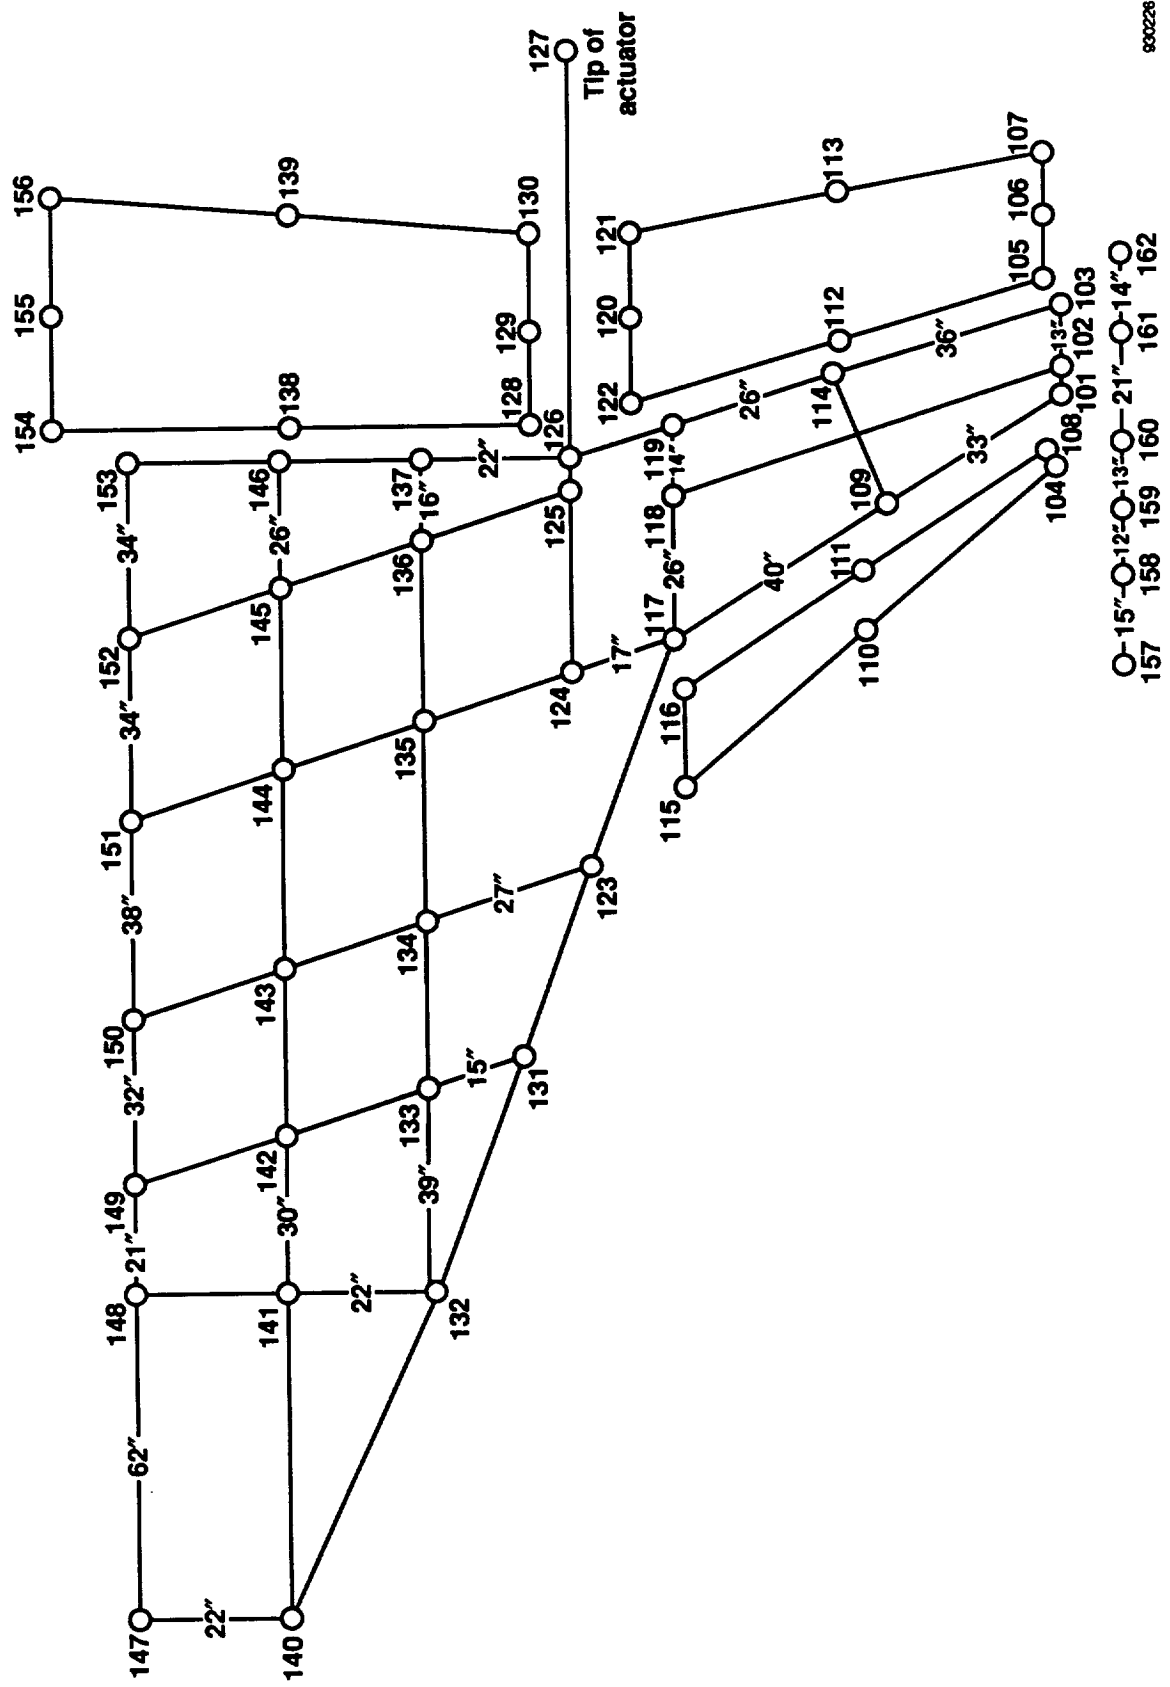

900228

Figure A-1.

830227

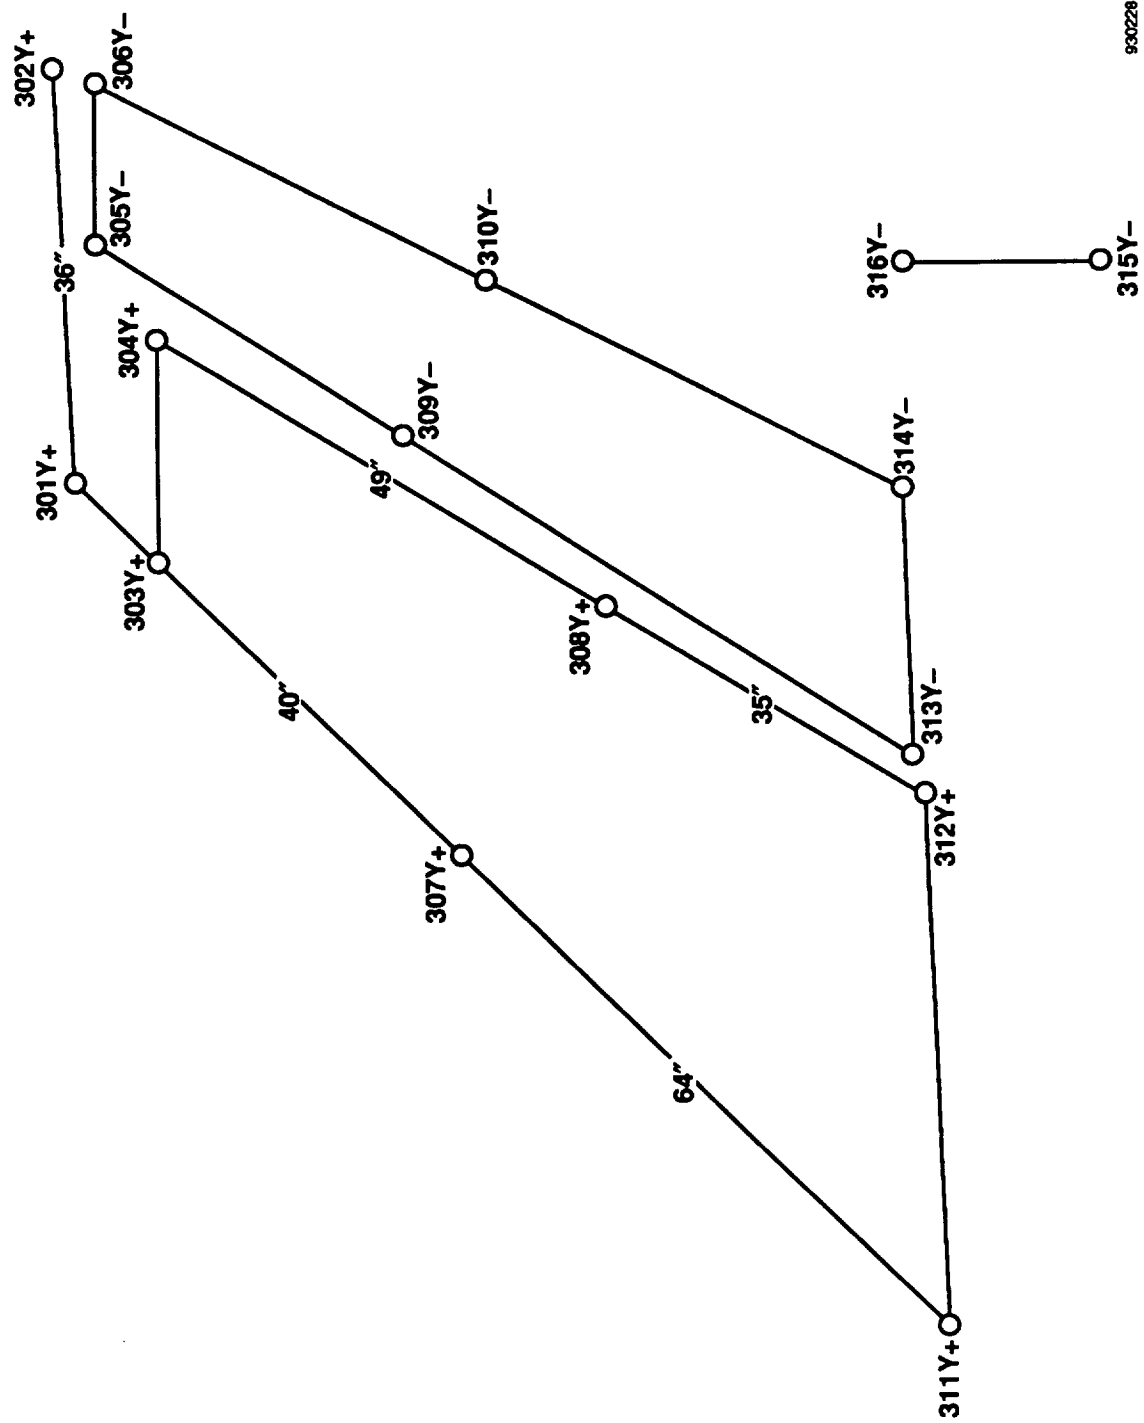


Figure A-3.

930228

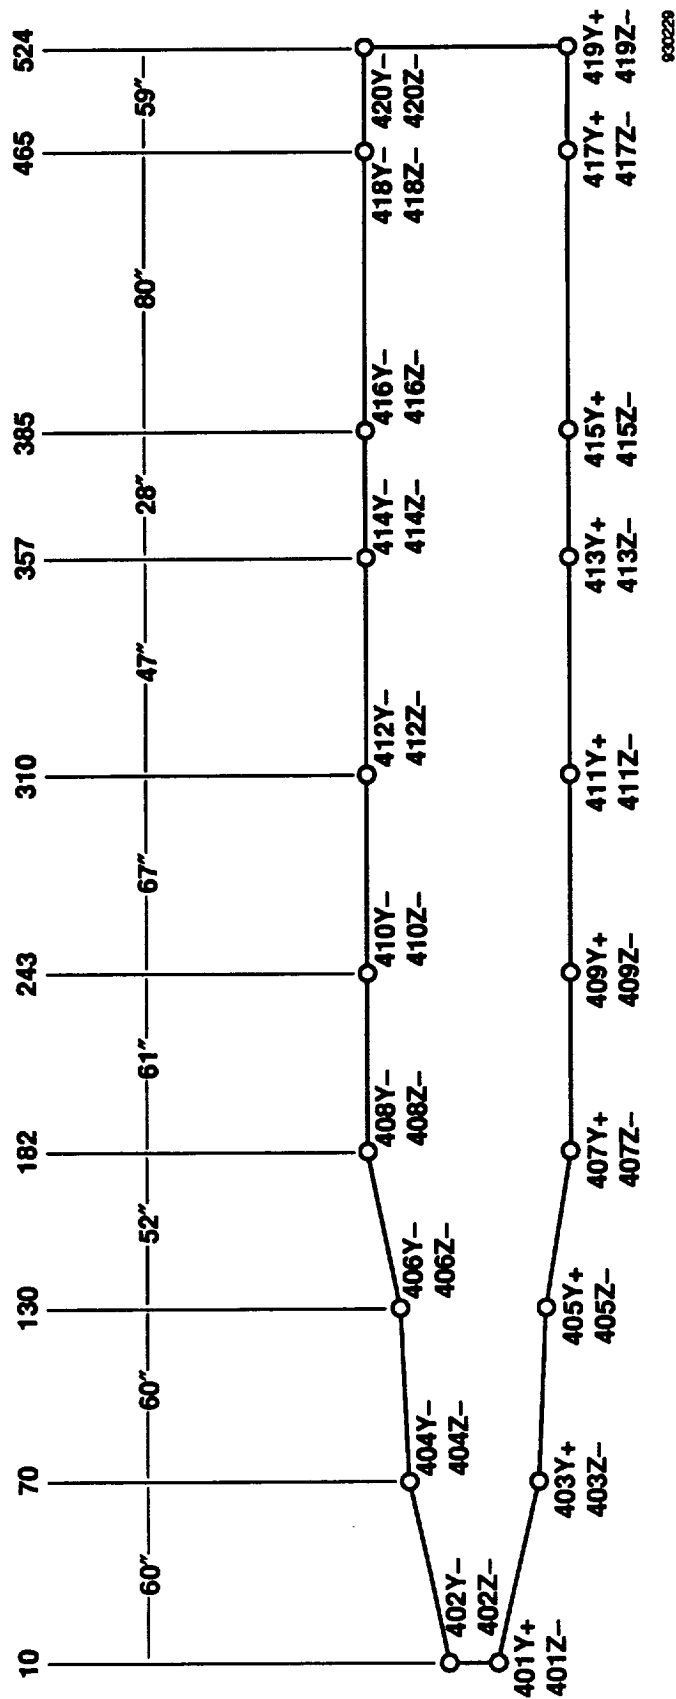


Figure A-4.

930229

REPORT DOCUMENTATION PAGEForm Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)

2. REPORT DATE

June 1993

3. REPORT TYPE AND DATES COVERED

Technical Memorandum

4. TITLE AND SUBTITLE

Ground Vibration and Flight Flutter Tests of the Single-Seat F-16XL Aircraft
With a Modified Wing

5. FUNDING NUMBERS

WU 533-02-35

6. AUTHOR(S)

David F. Voracek

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)

NASA Dryden Flight Research Facility
P.O. Box 273
Edwards, California 93523-02738. PERFORMING ORGANIZATION
REPORT NUMBER

H-1906

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)

National Aeronautics and Space Administration
Washington, DC 20546-000110. SPONSORING/MONITORING
AGENCY REPORT NUMBER

NASA TM- 104264

11. SUPPLEMENTARY NOTES

12a. DISTRIBUTION/AVAILABILITY STATEMENT

Unclassified—Unlimited
Subject Category 05

12b. DISTRIBUTION CODE

13. ABSTRACT (Maximum 200 words)

The NASA single-seat F-16XL aircraft was modified by the addition of a glove to the left wing. Vibration tests were conducted on the ground to assess the changes to the aircraft caused by the glove. Flight flutter testing was conducted on the aircraft with the glove installed to ensure that the flight envelope was free of aeroelastic or aeroservoelastic instabilities. The ground vibration tests showed that above 20 Hz, several modes that involved the control surfaces were significantly changed. Flight test data showed that modal damping levels and trends were satisfactory where obtainable. The data presented in this report include estimated modal parameters from the ground vibration and flight flutter test.

14. SUBJECT TERMS

Aeroelasticity, Flight flutter testing, Ground vibration testing

15. NUMBER OF PAGES

61

16. PRICE CODE

AO4

17. SECURITY CLASSIFICATION
OF REPORT

Unclassified

18. SECURITY CLASSIFICATION
OF THIS PAGE

Unclassified

19. SECURITY CLASSIFICATION
OF ABSTRACT

Unclassified

20. LIMITATION OF ABSTRACT

Unlimited